

TRAFFIC IMPACT STUDY

COCOA APARTMENTS
CITY OF COCOA, BREVARD COUNTY



Prepared for:

Framework Group, LLC
1200 W Platt Street, Suite 201
Tampa, Florida 33603

Prepared by:

Traffic Planning and Design, Inc.
535 Versailles Drive
Maitland, Florida 32751
407-628-9955

August 2020

Revised
December 2020

TPD № 5382

PROFESSIONAL ENGINEERING CERTIFICATION

I hereby certify that I am a Professional Engineer properly registered in the State of Florida practicing with Traffic Planning & Design, Inc., a corporation authorized to operate as an engineering business, EB-3702, by the State of Florida Department of Professional Regulation, Board of Professional Engineers, and that I have prepared or approved the evaluations, findings, opinions, conclusions, or technical advice attached hereto for:

PROJECT: Cocoa Apartments
LOCATION: City of Cocoa, Brevard County
CLIENT: Framework Group, LLC

I hereby acknowledge that the procedures and references used to develop the results contained in these computations are standard to the professional practice of Transportation Engineering as applied through professional judgment and experience.

NAME: Turgut Dervish, P.E.

P.E. No: 20400

DATE: December 7, 2020

SIGNATURE:



TABLE OF CONTENTS

	Page
INTRODUCTION	1
EXISTING CONDITIONS ANALYSIS	3
Roadway Segment Analysis	
Intersection Analysis	
PROPOSED DEVELOPMENT AND TRIP GENERATION	6
Trip Generation	
Trip Distribution/Trip Assignment	
Significance Analysis	
PROJECTED TRAFFIC CONDITIONS	11
Roadway Segment Analysis	
Intersection Analysis	
Site Access and Auxiliary Lanes	
STUDY CONCLUSIONS	14
APPENDICES.....	15
A Space Coast/TPO Traffic Count Database	
B Intersection Traffic Counts & Adjustments Factors	
C Existing HCS Capacity Worksheets	
D ITE Trip Generation Sheets	
E Model Distribution Plot	
F Trends Analysis Worksheets	
G Projected HCS Capacity Worksheets	

TABLE OF CONTENTS, continued

LIST OF TABLES

	Page
Table 1 Existing P.M. Peak Hour Roadway Capacity Analysis.....	3
Table 2 Existing Intersection Capacity Analysis	4
Table 3 Trip Generation Summary.....	7
Table 4 Significance Analysis	10
Table 5 Projected Traffic Conditions Analysis	11
Table 6 Projected Intersection Capacity Analysis.....	12

LIST OF FIGURES


Figure 1 Site Location	2
Figure 2 Existing P.M. Peak Hour Traffic Volumes	5
Figure 3 Site Plan	8
Figure 4 Trip Distribution and Assignment.....	9
Figure 5 Projected P.M. Peak Hour Traffic Volumes	13

INTRODUCTION

This analysis was undertaken in order to assess the traffic impact of the proposed development of the Cocoa Apartments in Cocoa, Brevard County. Located in the northwest corner of the SR 524 and E. Industry Road intersection, the development will consist of 280 multi-family dwelling units and 20,000 square feet of retail commercial in an adjacent outparcel. **Figure 1** depicts the site location and the area roadways.

Data utilized in this study consisted of a site plan provided by Project Engineers, traffic volume data and Level of Service standards obtained from the Space Coast MPO. Additionally, intersection turning movement counts were collected by Traffic Planning and Design, Inc. staff.



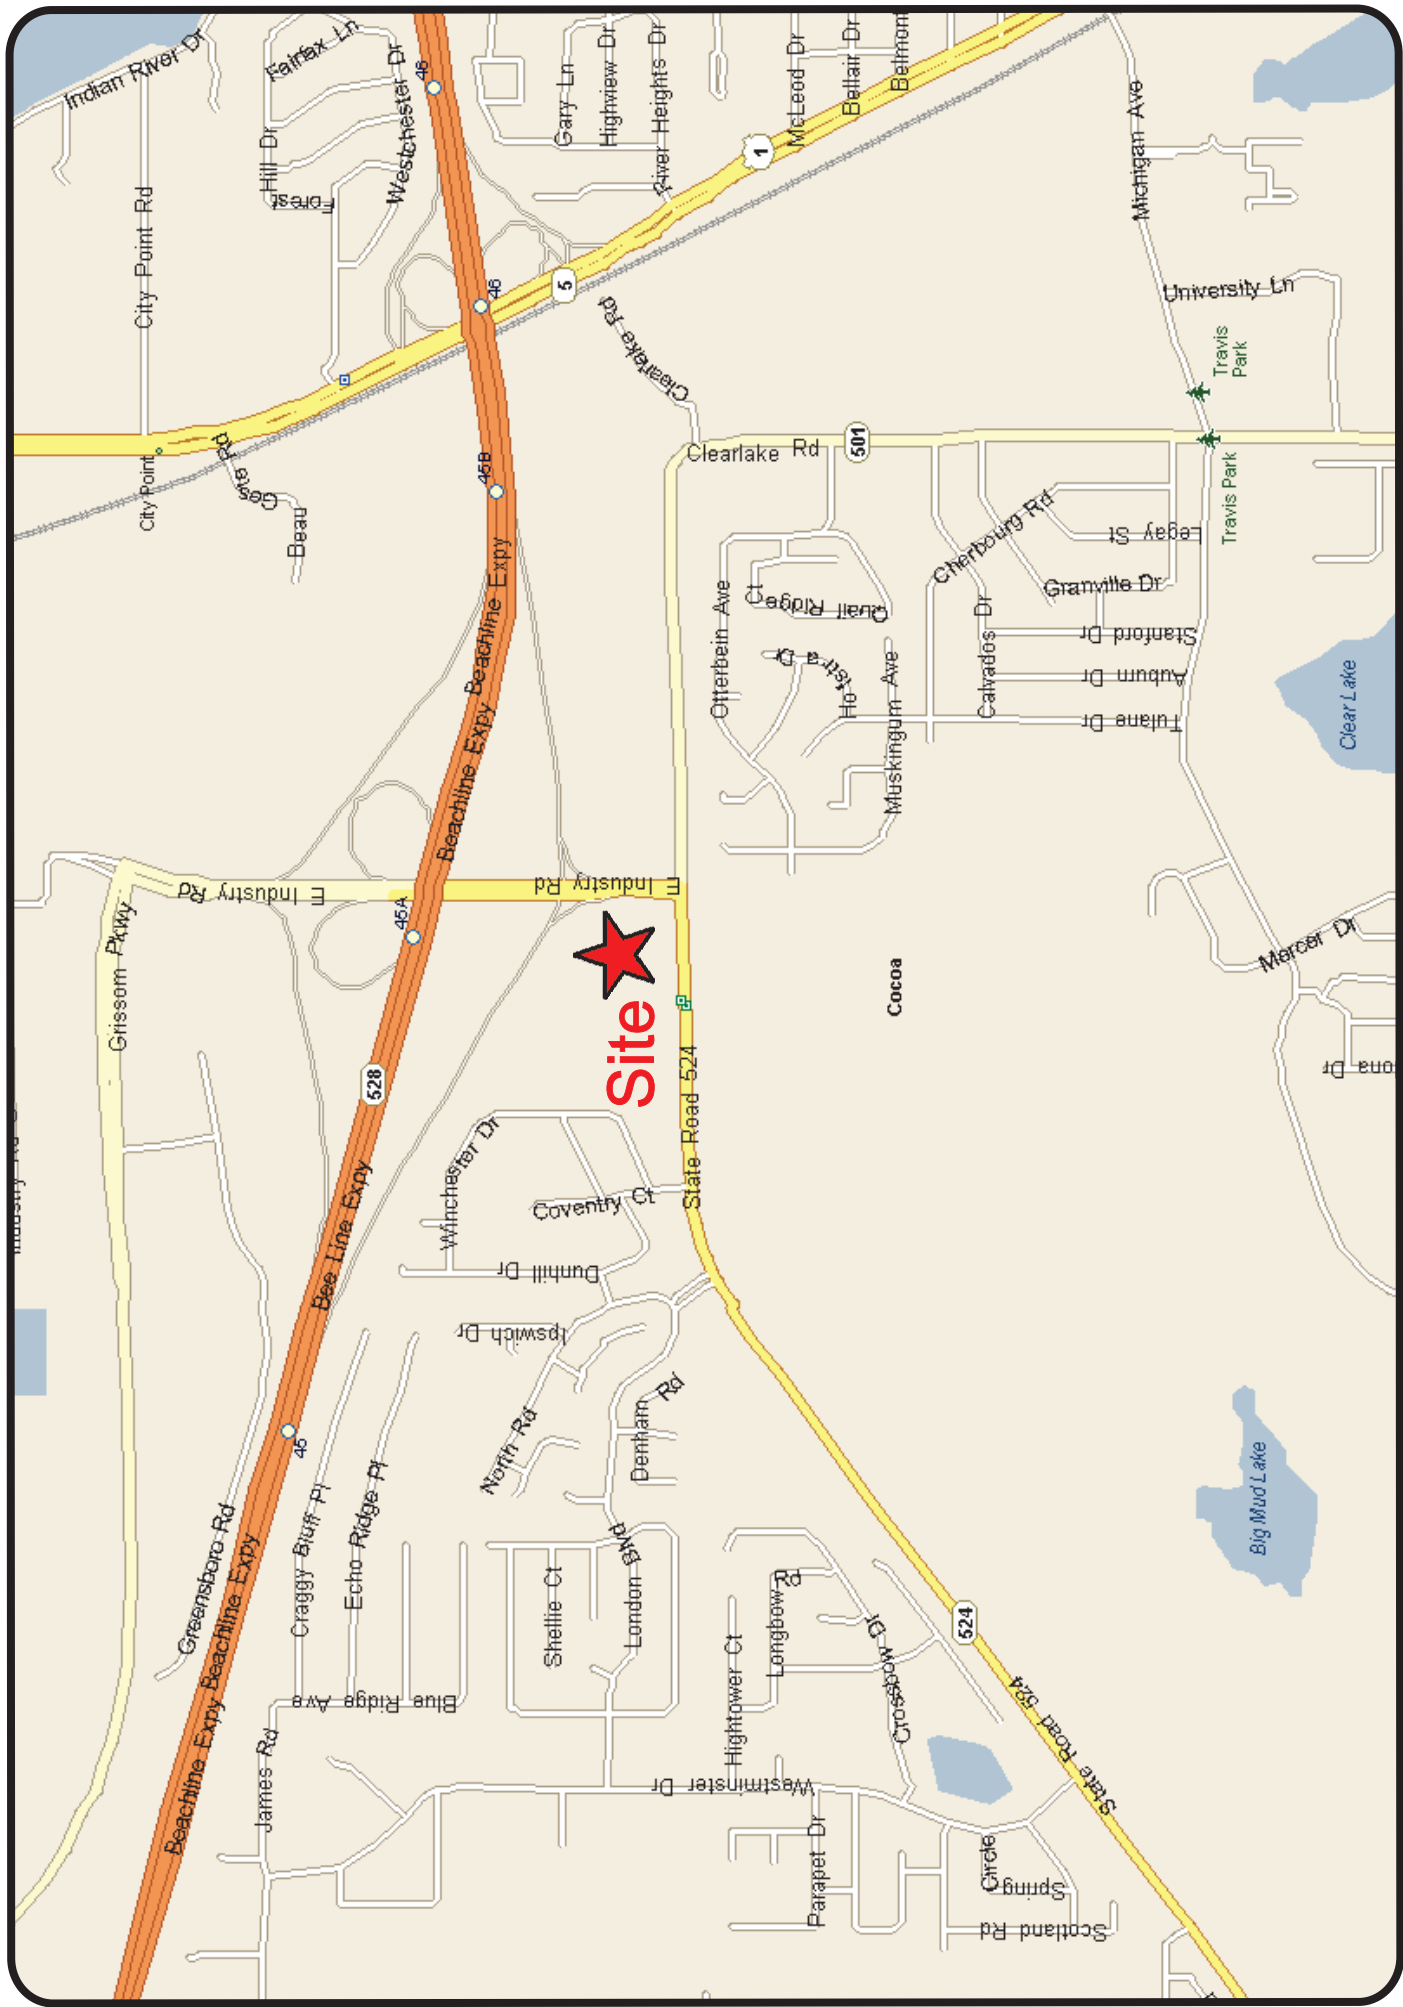

Site Location

EXISTING CONDITIONS ANALYSIS

A capacity analysis was performed for the study roadway segments and intersections identified utilizing a 5% significance threshold as per Brevard County guidelines. As will be documented subsequently, only a short segment of SR 524 adjacent to the project site will be significantly impacted. Therefore, this and other adjacent roadway segments and the closest signalized intersections were included in the analysis. The analysis was conducted utilizing existing traffic volumes to establish the current operating conditions for the daily conditions for the roadway segments and P.M. peak hour traffic conditions for the intersections.

Roadway Segment Analysis

The adjacent roadway segments were analyzed by comparing their existing traffic volumes with the adopted LOS/capacities for daily traffic conditions. The existing daily traffic volumes and adopted LOS capacities were obtained from the Space Coast TPO. Pertinent pages from the traffic count database are included in **Appendix A**. The existing capacity analysis is summarized in **Table 1**.

Table 1
Existing Daily Roadway Capacity Analysis

Seg. ID	Roadway Segment	No. of Lanes	Functional Classification	Adopted*		Existing Daily Volume	V/C Ratio	LOS
				LOS	MAV			
SR 524								
76	Cox Rd to London Blvd	2	Urban Minor Arterial	D	19,470	13,380	0.69	C
	London Blvd to Site Access	2	Urban Minor Arterial	D	19,470	13,380	0.69	C
	Site Access to Industry Rd	2	Urban Minor Arterial	D	19,470	13,380	0.69	C
Clearlake Road								
95/50	SR 524 to Otterbein Ave	4	Urban Minor Arterial	E	41,790	18,610	0.45	C
39	Otterbein Ave to Michigan Ave	4	Urban Minor Arterial	E	39,800	19,530	0.49	C
Industry Road								
198	SR 524 to Grissom Pkwy	4	Urban Minor Arterial	E	41,790	20,700	0.50	C
594	Grissom Pkwy to Cidco Rd	2	Urban Local	E	15,600	4,570	0.29	C

* Based on the Space Coast TPO Traffic Count Spreadsheets

As shown, the existing conditions analysis reveals that the study roadway segments currently operate satisfactorily above their adopted Level of Service capacity.



Intersection Analysis


In addition to the adjacent roadway segments, three signalized intersections on SR 524 were included in the analysis. The intersections were analyzed in accordance with the procedures of the *Highway Capacity Manual (HCM 6E)* and *Highway Capacity Software (HCS)*. In the analysis, existing P.M. peak hour traffic volumes and intersection geometry were used. The intersection counts were made in August 2020 and may not represent normal traffic conditions due to COVID-19 pandemic. Therefore, a COVID factor of 1.23 was determined by comparing 2019 counts with the 2020 counts on Industry Road just north of SR 524. This factor was applied to the existing counts in addition to the Seasonal Factor (SF) of 1.11 obtained from FDOT for Brevard County. The adjusted intersection volumes in the form of turning movement counts are depicted in **Figure 2**. The intersection traffic counts, and adjustments factors are included in **Appendix B**. The results of the intersection capacity analysis are summarized in **Table 2**.

Table 2
Existing Intersection Capacity Analysis

Intersection	Control	EB		WB		NB		SB		Overall	
		Delay	LOS	Delay	LOS	Delay	LOS	Delay	LOS	Delay	LOS
SR 524/London Blvd	Signal	4.1	A	9.0	A	--	--	32.7	C	8.3	A
SR 524 & Site Entrance/SC west Entrance	Signal	21.6	C	24.4	C	61.4	E	65.2	E	28.7	C
SR 524 & Industry Rd	Signal	45.2	D	32.5	C	93.1	D	53.7	D	43.6	D

The study intersections currently operate at satisfactory Levels of Service. The *HCS* capacity analysis worksheets are included in **Appendix C**.



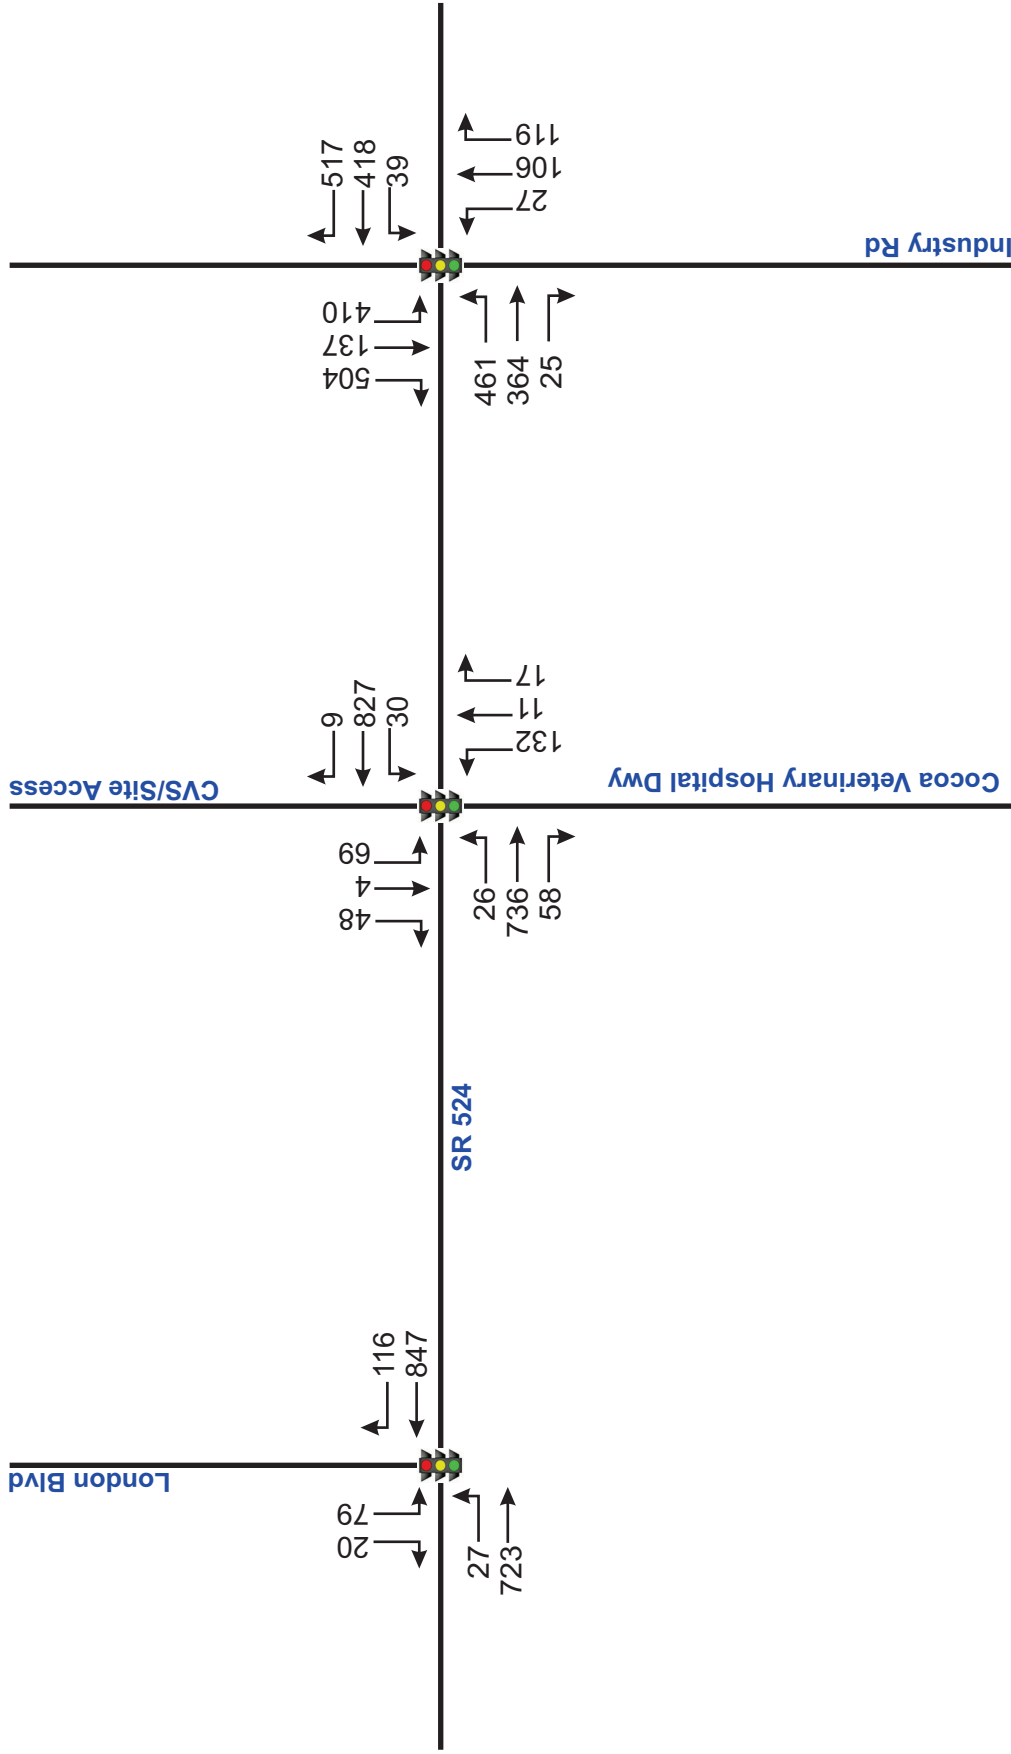

Existing P.M. Peak Hour Traffic Volumes

PROPOSED DEVELOPMENT AND TRIP GENERATION

The proposed development will consist of 280 multi-family dwelling units and 20,000 square feet of retail commercial. Access to the development will be provided by a signalized full access on SR 524 which currently serves the existing CVS store. **Figure 3** depicts the site plan and its access configuration. To determine the impact of the development in the area, an analysis of its trip generation characteristics was made. This included the determination of the number of trips generated by the site and their distribution onto the surrounding roadways.

Trip Generation

Trip generation rates were obtained from data contained in the Institute of *Transportation Engineers (ITE) Trip Generation Manual, 10th Edition*. The trip generation calculation of daily and P.M. peak hour volumes is summarized in **Table 3**, and the trip generation charts are included in **Appendix D**. The retail commercial development will generate 34% of its trips from the existing traffic stream on SR 524. Subtracting the pass-by trips results in new net trips to be added to the area roadways. The proposed development is estimated to generate 3,394 new net daily trips, 257 P.M. peak hour trips to be added to the area roadways.

Trip Distribution/Trip Assignment

To determine the distribution of the project trips in the area, the CFRPM (V6.1) was used. A slight modification was made to this model to add a TAZ representing the project and its SE data. Subsequently, the model was run with a Select Zone Analysis which produced a distribution of the project trips in the area. The model-generated distribution is included in **Appendix E**. The project trip distribution in the project vicinity is illustrated in **Figure 4**. Utilizing this distribution pattern, the development's daily and P.M. peak hour trips were assigned to the area roadways also shown in Figure 4.



Table 3
Trip Generation Summary

ITE Code	Land Use	Size*	Daily Trips		A.M. Peak Hour Generation				P.M. Peak Hour Generation			
			Rate	Trips	Rate**	Enter	Exit	Total	Rate**	Enter	Exit	Total
220	Multi-Family Residential	280 DU	7.4	2,076	0.45	29	98	127	0.53	93	55	148
820	Retail Commercial	20.0 KSF	100.6	2,012	0.94**	12	7	19	8.00	79	86	165
Total Trips			--	4,088	--	41	105	146	--	172	141	313
Pass-by Trips/Retail (34%) ***			--	694	--	4	3	7	--	27	29	56
Total Net New Trips			--	3,394	--	37	102	139	--	145	112	257

* DU = Dwelling Units, KSF=1,000 square feet

** Average Rate Used, other rates derived from ITE Equations ($R^2 > 0.75$)

***Obtained from the 3rd Edition of the ITE Trip Generation Handbook





Cocoa Apartments
Project No 5382
Figure 3

Significance Analysis

As per Brevard County procedures and requirements, the influence area of the proposed project will include those roadway segments where project trips consume 5% or more of the Maximum Allowable Volume (MAV). Based upon the significance test performed, as shown in **Table 4**, the project will consume 5% or more of the adopted MAV at only a short segment of SR 524 from the CVS/Site Access to Industry Road. This segment along with the adjacent roadway segments of SR 524, Industry Road and Clearlake Road were included in the analysis.

Additionally, the following intersections were included in the analysis:

- SR 524 & London Boulevard
- SR 524 & Site Entrance/CVS Entrance
- SR 524 & Industry Road

Table 4
Significance Analysis

Seg ID	Roadway Segment	Adopted		Project Trips		Significance **
		LOS	MAV	%*	Volume	
SR 524						
76	Cox Rd to London Blvd	D	19,470	17%	577	2.96
	London Blvd to Site Access	D	19,470	21%	713	3.66
	Site Access to Industry Rd	D	19,470	74%	2,512	12.90
Clearlake Road						
49/50	SR 524 to Otterbein Ave	E	41,790	42%	1,425	3.41
39	Otterbein Ave to Michigan Ave	E	39,800	37%	1,256	3.16
32	Michigan Ave to Rosetine St	E	39,800	18%	611	1.53
Industry Road						
198	SR 524 to Grissom Pkwy	E	41,790	32%	1,086	2.60
594	Grissom Pkwy to Cidco Rd	E	15,600	7%	238	1.52
Michigan Avenue						
48	Clearlake Rd to US 1	E	39,800	16%	543	1.36

*Highest Percentage on the Link

**Project Trips as % of MAV



PROJECTED TRAFFIC CONDITIONS

Projected traffic conditions were analyzed using projected traffic volumes for the roadway segments and study intersections in 2023. To determine the projected traffic volumes for the project's buildout year, background traffic volumes were combined with the approved Integra Cocoa trips plus project trips. Background traffic volumes were estimated with the use of an annual growth rate of 2.00%. The historical trends analysis of traffic counts on SR 524 and Industry Road in the project vicinity indicated an annual growth rate ranging from 1.23% to 2.10% to the design year. The trends analysis charts are included in **Appendix F**.

Roadway Segment Analysis

Table 5 is an analysis of the projected traffic conditions for the study roadway segments. This table lists the roadway segments along with their number of lanes, functional classification, existing/ projected traffic volumes, LOS/capacity and resultant Level of Service. The table reveals that the roadway segments are projected to operate satisfactorily within their adopted LOS standards.

Table 5
Projected Traffic Conditions Analysis

Segment ID	Roadway Segment	# of Lns	Functional Classification	Adopted		Projected Daily Volume				V/C Ratio	Projected LOS
				LOS	MAV	Background*	Integra Cocoa	Project Trips	Total Volume		
SR 524											
75	Cox Rd to London Blvd	2	Urban Minor Arterial	D	19,470	14,183	660	577	15,420	0.79	C
	London Blvd to Site Access	2	Urban Minor Arterial	D	19,470	14,183	696	713	15,592	0.80	C
	Site Access to Industry Rd	2	Urban Minor Arterial	D	19,470	14,183	696	2,512	17,391	0.89	C
Clearlake Road											
	SR 524 to Otterbein Ave	4	Urban Minor Arterial	E	41,790	19,727	298	1,425	21,450	0.51	C
	Otterbein Ave to Michigan Ave	4	Urban Minor Arterial	E	39,800	20,511	278	1,256	22,045	0.55	C
Industry Road											
198	SR 524 to Grissom Pkwy	4	Urban Minor Arterial	E	41,790	21,942	391	1,086	23,419	0.56	C
594	Grissom Pkwy to Cidco Rd	2	Urban Local	E	15,600	4,844	44	238	5,126	0.33	C

* Existing Volume X 1.06



Intersection Analysis

The projected traffic volumes at the study intersections, and the two site access driveways are depicted in **Figure 5**. The figure shows the background P.M. peak hour traffic along with traffic generated by the project. The intersections were analyzed utilizing *Highway Capacity Software (HCS)* in accordance with the *Highway Capacity Manual (HCM 6E)*. The results of this analysis as summarized in **Table 6** indicate satisfactory traffic operating conditions under projected conditions. The *HCS* capacity analysis worksheets are included in **Appendix G**.

Table 6
Projected Intersection Capacity Analysis

Intersection	Control	EB		WB		NB		SB		Overall	
		Delay	LOS	Delay	LOS	Delay	LOS	Delay	LOS	Delay	LOS
SR 524/London Blvd	Signal	5.3	A	9.8	A	0.0	A	41.5	D	9.7	A
SR 524 & Industry Rd	Signal	43.7	D	37.4	D	46.6	D	74.1	E	51.6	D
SR 524 & Site Entrance/SC west Entrance	Signal	33.2	C	52.4	D	73.1	E	61.8	E	47.3	D

Site Access and Auxiliary Lanes


The site is proposed to be served by the existing signalized full access driveway on SR 524 which currently served the CVS store. A 465-foot-long left turn lane and a 290-foot right turn lane exist at this site access driveway. To determine the adequacy of these turn lane lengths, the following analysis was performed:

Length Required = Deceleration Distance (DD) + Queue Length (QL)

- DD = 185 ft (for 45 mph), from FDOT Index 711-001
- Left Turn Lane required = 185 + 126 ft QL from HCS = 311 ft.
- Right Turn Lane Required = 185 + 81 ft QL from HCS = 266 ft

Based upon this analysis, the existing turn lane lengths are adequate.



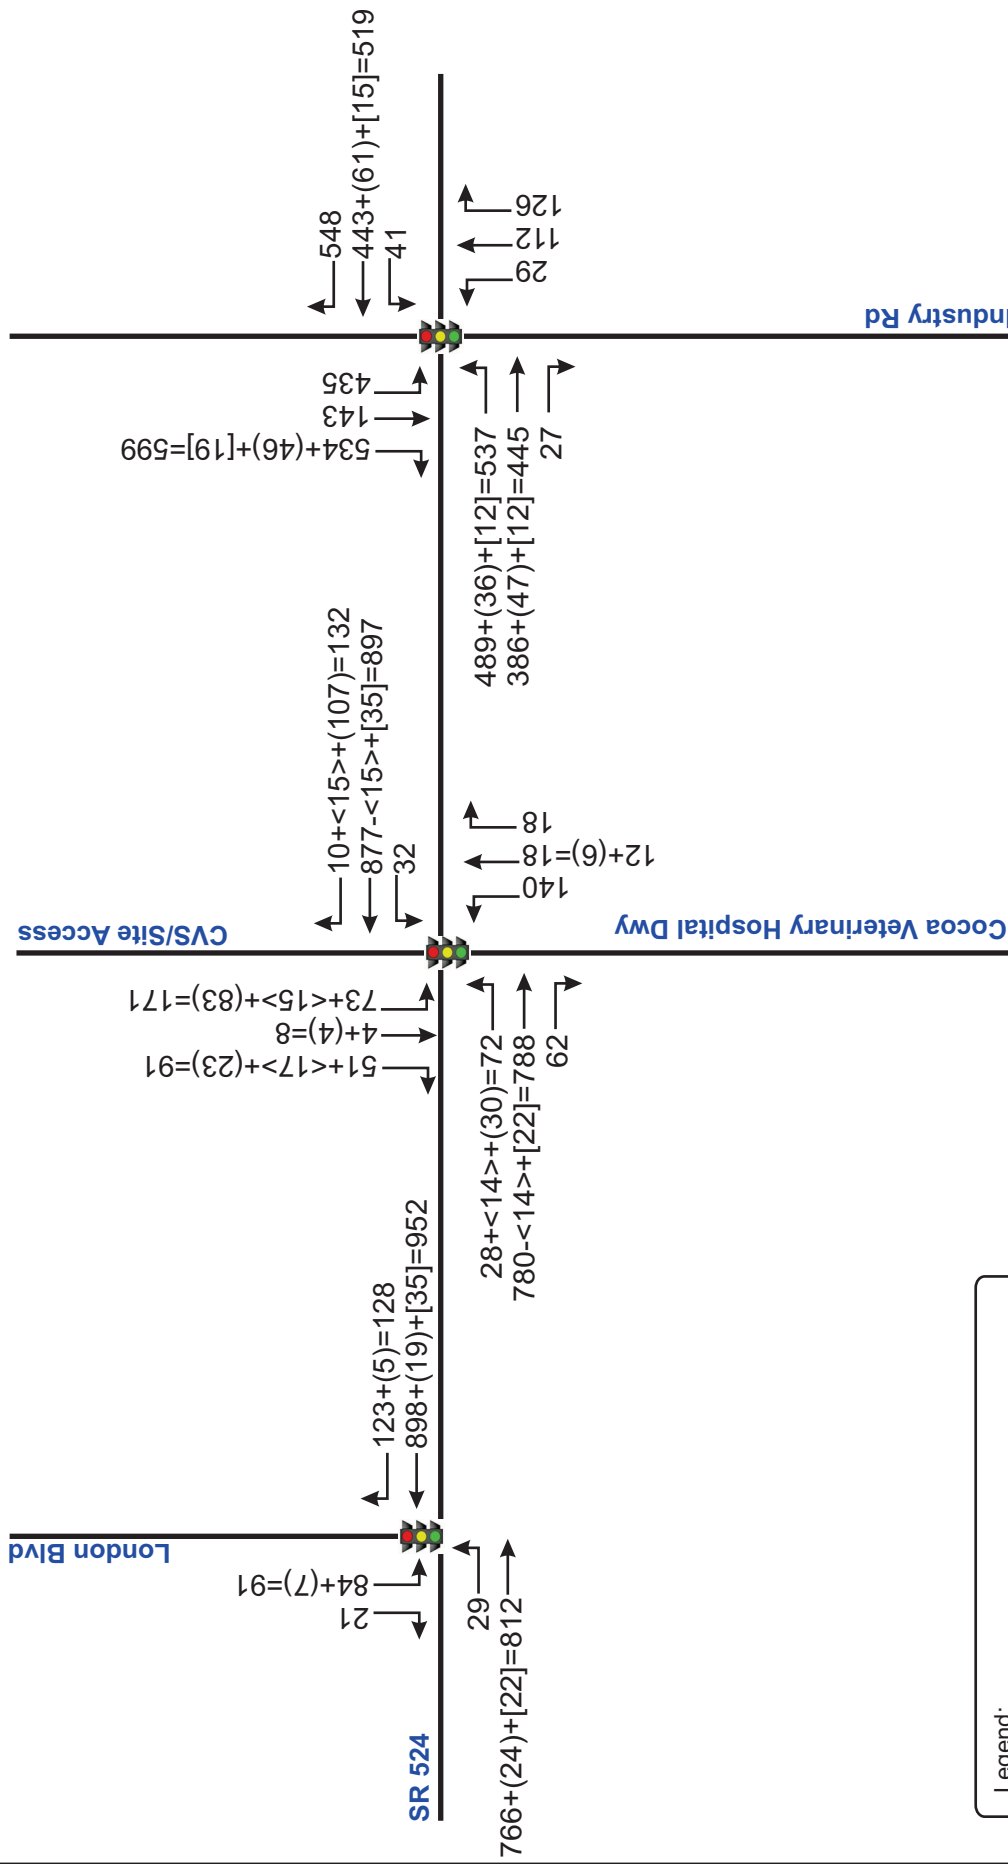

Projected P.M. Peak Hour Traffic Volumes

STUDY CONCLUSIONS

This traffic analysis was conducted in order to assess the traffic impact of the proposed development of the Cocoa Apartments in Cocoa, Brevard County. Located in the northwest corner of the SR 524 and E. Industry Road intersection, the development will consist of 280 multi-family dwelling units and 20,000 square feet of retail commercial in an outparcel. The findings of this analysis are as follows:

- The proposed development will generate 3,394 new net daily trips and 257 P.M. peak hour trips.
- The analysis of existing conditions indicates that the impacted roadway segment and the study intersections currently operate at satisfactory Levels of Service.
- The analysis of projected traffic conditions revealed that the impacted roadway segments and the study intersections will not be deficient in traffic capacity. The roadway segments and the intersections are projected to operate at satisfactory Levels of Service with project trips added.
- The site is proposed to be served via an existing full access connection on SR 524 which is signalized. There are an existing right and left turn lanes which would be adequate for the projected turns as a result of the proposed development.



APPENDICES

APPENDIX A

Space Coast/TPO Traffic Count Database

SPACE COAST TRANSPORTATION PLANNING ORGANIZATION TRAFFIC COUNTS: 2010 - 2019

ID	ROAD	SEGMENT (Sections)	2010 AADT	2011 AADT	2012 AADT	2013 AADT	2014 AADT	2015 AADT	2016 AADT	2017 AADT	2018 AADT	2019 AADT	Current MAV	Last Count Taken	Functional Classification
AREA: CENTRAL															
18	SPYGLASS HILL	MURRELL-PINEHURST	4,320	4,250	3,980	3,880	3,780	3,960	4,240	4,720	4,640	4,780	15,600	1/14/2019	Urban Minor Collector
	SR 520	ORANGE CO.-I-95	14,937	16,157	14,740	15,090	15,167	17,220	16,670	16,637	16,567	17,160			
534	SR 520	ORANGE CO.-SR 524	12,790	14,750	13,480	13,140	12,760	15,950	15,170	15,750	12,240	16,010	40,300	1/23/2019	Rural Principal Arterial Other
1	SR 520	SR 524-Friday	14,110	15,180	13,290	14,050	13,990	15,720	14,880	14,320	16,610	14,650	41,790	3/5/2019	Urban Principal Arterial-Other
84	SR 520	Friday-I-95	17,910	18,540	17,450	18,080	18,750	19,990	19,960	19,840	20,850	20,820	41,790	1/23/2019	Urban Principal Arterial-Other
	SR 520	I-95-CLEARLAKE	21,343	19,957	19,850	20,367	20,583	23,857	22,600	21,240	20,573	23,173			
2	SR 520	I-95-Burnett	20,710	19,420	19,910	20,200	21,440	24,190	22,190	21,780	21,740	21,650	41,790	1/28/2019	Urban Principal Arterial-Other
3	SR 520	Burnett-Range	21,640	20,040	20,350	19,980	19,680	24,180	22,970	21,040	20,040	21,280	41,790	1/28/2019	Urban Principal Arterial-Other
14	SR 520	Range-Clearlake	21,680	20,410	19,290	20,920	20,630	23,200	22,640	20,900	19,940	26,590	41,790	1/28/2019	Urban Principal Arterial-Other
	SR 520	CLEARLAKE-FISKE	22,115	21,390	20,045	20,815	21,385	24,880	24,575	22,915	22,735	22,115			
4	SR 520	Clearlake-Lake	19,950	19,630	18,380	19,160	19,560	22,860	22,870	20,200	20,800	20,400	39,800	1/23/2019	Urban Principal Arterial-Other
5	SR 520	Lake-Fiske	24,280	23,150	21,710	22,470	23,210	26,900	26,280	25,630	24,670	23,830	39,800	1/23/2019	Urban Principal Arterial-Other
	SR 520	FISKE-US 1	25,505	25,210	23,390	23,775	25,160	28,120	28,250	26,600	25,495	25,275			
6	SR 520	Fiske-Blake	25,490	25,310	23,390	23,820	25,090	28,270	28,430	26,540	25,550	25,280	41,790	1/23/2019	Urban Principal Arterial-Other
7	SR 520	Blake-US 1	25,520	25,110	NC	23,730	25,230	27,970	28,070	26,660	25,440	25,270	41,790	1/23/2019	Urban Principal Arterial-Other
	SR 520 (Eastbound)	US 1-CAUSEWAY (EB)	19,695	20,125	19,215	19,838	19,020	21,483	18,600	20,718	20,855	21,135			
8	SR 520	US 1-Forrest	13,790	15,200	14,530	15,570	17,090	18,210	13,820	16,750	17,250	16,830	19,440	1/22/2019	Urban Principal Arterial-Other
9	SR 520	Forrest-Brevard	21,780	21,710	20,280	21,020	19,560	21,850	19,620	22,460	20,930	22,250	19,440	1/22/2019	Urban Principal Arterial-Other
10	SR 520	Brevard-Delannoy	20,970	21,450	20,280	20,900	19,450	22,930	22,010	21,670	22,280	22,500	19,440	1/22/2019	Urban Principal Arterial-Other
11	SR 520	Delannoy-Riveredge	22,240	22,140	21,770	21,860	19,980	22,940	18,950	21,990	22,960	22,960	19,440	1/22/2019	Urban Principal Arterial-Other
	SR 520 (Westbound)	CAUSEWAY-US 1 (WB)	20,790	21,085	20,205	20,770	20,643	21,703	20,098	21,220	20,920	21,915			
12	SR 520	Causeway-Delannoy	22,570	23,220	21,860	22,160	21,250	23,700	23,050	21,130	22,990	22,780	19,440	1/22/2019	Urban Principal Arterial-Other
13	SR 520	Delannoy-Brevard	24,230	24,360	23,150	23,970	23,100	23,460	21,900	24,290	22,980	24,250	19,440	1/22/2019	Urban Principal Arterial-Other
15	SR 520	Brevard-Forrest	21,710	21,530	21,080	21,220	21,560	22,400	18,690	21,810	20,660	21,610	19,440	1/22/2019	Urban Principal Arterial-Other
87	SR 520	Forrest-US 1	14,650	15,230	14,730	15,730	16,660	17,250	16,750	17,650	17,050	19,020	19,440	1/22/2019	Urban Principal Arterial-Other
66	SR 524	SR 520-I-95	4,680	4,650	4,400	4,670	4,530	5,690	5,300	5,890	7,200	6,870	24,200	1/23/2019	Urban Minor Arterial
	SR 524	I-95-INDUSTRY RD	11,490	11,180	10,795	11,220	10,880	12,765	12,605	11,710	13,860	12,540			
73	SR 524	I-95-Cox	10,050	9,810	9,610	9,780	9,670	11,440	11,170	10,460	12,690	11,700	18,590	1/23/2019	Urban Minor Arterial
76	SR 524	Cox-Industry Rd	12,930	12,550	11,980	12,660	12,090	14,090	14,040	12,960	15,030	13,380	19,470	1/23/2019	Urban Minor Arterial
	SR 528	ORANGE CO.-I-95	26,750	28,240	26,205	27,835	28,320	34,205	31,740	33,780	40,640	37,805			
91	SR 528	ORANGE CO.-SR 407	29,770	31,790	28,950	30,820	30,220	37,830	35,120	37,330	40,640	42,560	43,000	3/12/2019	Rural Principal Arterial - Freeways & Expressways
90	SR 528	SR 407-I-95	23,730	24,690	23,460	24,850	26,420	30,580	28,360	30,230	NC	33,050	43,000	1/29/2019	Rural Principal Arterial - Freeways & Expressways
	SR 528	I-95-US 1	25,550	25,950	24,945	25,860	25,315	30,165	27,775	28,340	31,000	32,730			
93	SR 528	I-95-INDUSTRY RD	20,820	21,360	20,720	21,000	23,050	23,030	22,810	23,290	29,350	28,880	74,400	1/29/2019	Urban Principal Arterial - Freeways & Expressways
92	SR 528	INDUSTRY RD-US 1	30,280	30,540	29,170	30,720	27,580	37,300	32,740	33,390	32,650	36,580	74,400	1/29/2019	Urban Principal Arterial - Freeways & Expressways
25	STADIUM PKWY	WICKHAM-JAMIESON	4,890	5,090	5,910	6,550	6,890	7,810	8,480	9,150	10,460	11,240	17,700	1/14/2019	Urban Minor Arterial
	STADIUM PKWY	JAMIESON-I-95	15,500	15,880	15,585	16,515	16,965	17,707	18,173	19,337	20,273	20,780			
26	STADIUM PKWY	Jamieson-Viera Blvd	16,570	17,350	17,250	18,270	18,910	19,950	20,890	22,170	22,920	23,650	39,800	1/16/2019	Urban Minor Arterial
535	STADIUM PKWY	VIERA BLVD.-ROSEMOUNT DR	14,430	14,410	13,920	14,760	15,020	15,980	16,120	17,160	17,870	18,460	39,800	1/16/2019	Urban Minor Arterial
606	STADIUM PKWY	ROSEMOUNT DRIVE-I-95/FISKE						17,190	17,510	18,680	20,030	20,230	39,800	1/16/2019	Urban Minor Arterial
607	TAVISTOCK	JAMIESON-VIERA BLVD						3,300	3,680	3,720	3,780	3,620	15,600	1/14/2019	Urban Local
608	TAVISTOCK	VIERA BLVD-STADIUM PARKWAY						2,890	2,680	2,650	3,160	2,290	15,600	1/16/2019	Urban Local
	US 1	PINEDA-BARNES	32,480	33,950	27,120	29,530	31,853	32,577	32,687	30,737	32,013	31,497			
89	US 1	Pineda-Suntree Blvd	39,470	42,600	NC	33,100	37,580	37,310	38,750	34,340	38,730	37,540	41,790	1/14/2019	Urban Principal Arterial-Other
567	US 1	Suntree Blvd-Viera Blvd	30,740	31,160	28,680	28,770	31,550	32,650	31,520	30,670	31,070	29,740	41,790	3/6/2019	Urban Principal Arterial-Other
36	US 1	Viera Blvd-Barnes	27,230	28,090	25,560	26,720	26,430	27,770	27,790	27,200	26,240	27,210	41,790	3/13/2019	Urban Principal Arterial-Other
70	US 1	BARNES-EYSTER	24,700	25,800	23,920	26,150	25,690	25,980	26,300	25,060	26,090	26,340	41,790	3/12/2019	Urban Principal Arterial-Other

*Note: 2016 AADT's Beaches area were counted twice in 2016 and the AADT listed is the average of the two counts.
NC=Not Counted; UC=Under Construction

SPACE COAST TRANSPORTATION PLANNING ORGANIZATION TRAFFIC COUNTS: 2010 - 2019

ID	ROAD	SEGMENT (Sections)	2010 AADT	2011 AADT	2012 AADT	2013 AADT	2014 AADT	2015 AADT	2016 AADT	2017 AADT	2018 AADT	2019 AADT	Current MAV	Last Count Taken	Functional Classification
AREA: MERRITT ISLAND															
603	SPACE COMMERCE WAY	SR 3-NASA CAUSEWAY						3,090	3,040	3,780	3,440	4,960	12,900	2/18/2019	Rural Principal Arterial Other
	SR 520	HUMPHREY BR-S. BANANA	34,103	33,698	30,878	32,220	33,311	34,200	32,467	30,929	29,694	29,844			
101	SR 520	Bridge-N. Tropical	46,750	46,850	NC	44,390	46,090	48,440	44,400	44,820	39,660	43,440	59,900	2/4/2019	Urban Principal Arterial-Other
148	SR 520	N. Tropical-SR 3	38,370	38,460	37,670	37,240	34,900	39,820	37,210	36,850	35,640	35,120	59,900	2/6/2019	Urban Principal Arterial-Other
97	SR 520	SR 3-Plaza ent	34,550	33,760	33,430	31,820	34,410	33,630	32,070	29,870	28,700	25,840	62,900	2/4/2019	Urban Principal Arterial-Other
98	SR 520	Plaza ent-Plumosa	34,430	33,940	30,530	31,860	34,130	33,790	31,800	29,940	30,490	31,230	62,900	2/6/2019	Urban Principal Arterial-Other
99	SR 520	Plumosa-Mall ent	33,970	32,810	32,560	30,560	32,780	32,140	31,640	28,750	25,300	28,870	62,900	2/6/2019	Urban Principal Arterial-Other
100	SR 520	Mall ent-SykesCrkPkw	27,500	25,620	26,270	26,010	28,740	27,140	24,810	23,660	24,130	23,280	62,900	3/6/2019	Urban Principal Arterial-Other
149	SR 520	Sykes-Newfound HrbDr	34,630	34,170	32,270	32,520	33,160	34,480	35,170	30,740	31,000	30,070	62,900	2/13/2019	Urban Principal Arterial-Other
150	SR 520	Newfound Hbr-N Banana	28,560	27,750	27,330	27,290	28,940	29,920	28,670	26,820	26,050	25,830	62,900	2/13/2019	Urban Principal Arterial-Other
151	SR 520	N Banana-S Banana	28,170	29,920	26,960	28,290	26,650	28,440	26,430	26,910	26,280	24,920	62,900	2/13/2019	Urban Principal Arterial-Other
	SR 528	US 1-SR 401	36,903	36,847	35,343	37,053	37,850	39,243	37,940	39,587	38,480	39,403			
128	SR 528	US 1-N COURTENAY	45,990	46,150	43,000	44,700	45,760	49,740	48,660	48,600	44,630	46,100	74,400	3/6/2019	Urban Principal Arterial-Other
129	SR 528	N Crtny-N Banana Rv Dr	33,710	33,920	32,770	33,630	36,360	32,570	31,070	36,810	37,340	37,570	74,400	2/13/2019	Urban Principal Arterial-Other
127	SR 528	N Banana Rv Dr-SR 401	31,010	30,470	30,260	32,830	31,430	35,420	34,090	33,350	33,470	34,540	74,400	2/13/2019	Urban Principal Arterial-Other
123	SYKES CREEK	FORTENBERRY-SR 520	5,630	5,530	5,490	5,610	NC	5,610	5,390	5,440	4,830	4,670	33,800	2/6/2019	Urban Major Collector
121	SYKES CREEK	SR 520-MERRITT	12,460	11,970	12,010	11,770	12,210	12,640	12,680	12,070	12,570	12,010	39,800	2/6/2019	Urban Major Collector
108	SYKES CREEK	MERRITT-N BANANA	9,880	9,670	9,700	9,890	NC	10,610	11,080	10,970	10,660	10,090	17,700	2/18/2019	Urban Major Collector
AREA: CENTRAL															
75	ADAMSON	PINE-SR 524	4,360	5,220	4,720	4,880	4,700	5,210	5,380	5,340	6,100	5,100	17,700	3/5/2019	Urban Minor Collector
	BARNES	FISKE-MURRELL	16,580	16,410	15,420	15,060	15,460	15,895		13,145	13,835	17,545			
77	BARNES	FISKE-THREE MEADOWS DRIVE	16,580	16,410	15,420	15,060	15,460	15,940	UC	13,440	13,750	19,340	39,800	1/16/2019	Urban Principal Arterial-Other
604	BARNES	THREE MEADOWS DRIVE-MURRELL						15,850	UC	12,850	13,920	15,750	39,800	1/22/2019	Urban Principal Arterial-Other
72	BARNES	MURRELL-US 1	10,930	NC	9,560	NC	9,720	9,910	8,800	9,560	10,510	10,910	17,700	1/16/2019	Urban Principal Arterial-Other
49	CLEARLAKE	PLUCKEBAUM-SR 520	6,380	5,640	5,130	5,400	4,800	5,050	4,590	4,750	5,910	5,160	15,600	1/28/2019	Urban Major Collector
	CLEARLAKE	SR 520-MICHIGAN	20,650	18,265	17,620	15,747	15,933	18,307	18,030	16,990	17,407	16,327			
29	CLEARLAKE	SR 520-Lake	16,580	13,250	12,650	11,550	11,640	14,160	13,400	12,810	14,590	12,870	39,800	3/5/2019	Urban Minor Arterial
30	CLEARLAKE	Lake-Dixon	19,470	17,740	17,010	16,010	16,210	19,620	19,120	18,200	18,010	17,110	39,800	1/29/2019	Urban Minor Arterial
31	CLEARLAKE	Dixon-Rosetine	23,220	20,620	20,250	NC	19,950	NC	21,570	NC	19,620	NC	39,800	1/30/2018	Urban Minor Arterial
32	CLEARLAKE	Rosetine-Michigan	23,330	21,450	20,570	19,680	NC	21,140	NC	19,960	NC	19,000	39,800	3/5/2019	Urban Minor Arterial
	CLEARLAKE	MICHIGAN-SR 524	20,023	19,460	18,100	17,233	17,727	19,817	19,927	18,193	18,640	17,783			
39	CLEARLAKE	Michigan-Otterbein	22,180	21,620	20,360	18,910	18,410	21,290	21,320	19,970	20,550	19,530	39,800	1/29/2019	Urban Minor Arterial
50	CLEARLAKE	Otterbein-N. Wal-Mart Ent.	17,100	16,580	14,920	14,120	15,520	16,960	16,090	14,810	15,770	15,210	41,790	1/29/2019	Urban Minor Arterial
95	CLEARLAKE	WAL-MART-SR 524	20,790	20,180	19,020	18,670	19,250	21,200	22,370	19,800	19,600	18,610	41,790	1/29/2019	Urban Minor Arterial
61	COX	SR 520-SR 524	4,400	4,180	3,210	4,260	4,100	4,560	4,810	4,240	4,460	4,370	17,700	1/23/2019	Urban Major Collector
69	COX	SR 524-JAMES	2,670	2,520	2,550	2,580	2,490	2,760	2,690	2,600	2,660	2,630	17,700	1/23/2019	Urban Major Collector
	DIXON	CLEARLAKE-US 1	12,173	11,320	10,970	9,855	9,630	10,160	10,415	10,303	10,758	10,340			
47	DIXON	Clearlake-Pineda St	12,740	11,740	11,490	10,280	10,320	11,360	11,290	10,920	11,070	10,620	39,800	3/5/2019	Urban Minor Arterial
51	DIXON	Pineda St-Fiske	11,820	11,250	10,760	9,590	9,420	10,260	10,130	10,240	10,490	10,390	39,800	3/13/2019	Urban Minor Arterial
46	DIXON	Fiske-Byrd Plaza ent	12,640	11,430	NC	10,140	9,800	10,220	10,760	10,560	11,260	10,780	39,800	3/5/2019	Urban Minor Arterial
45	DIXON	Byrd Plaza Ent-US 1	11,490	10,860	10,660	9,410	8,980	8,800	9,480	9,490	10,210	9,570	39,800	1/29/2019	Urban Minor Arterial
	FISKE	I-95-BARTON	23,645	21,390	20,990	21,360	21,805	23,125	23,310	22,190	24,190	25,015			
44	FISKE	I-95/Barnes-Eyster	23,210	21,050	21,060	21,880	22,160	24,690	25,080	24,190	25,820	27,300	41,790	1/16/2019	Urban Principal Arterial-Other
96	FISKE	Eyster-Barton	24,080	21,730	20,920	20,840	21,450	21,560	21,540	20,190	22,560	22,730	41,790	1/22/2019	Urban Principal Arterial-Other

SPACE COAST TRANSPORTATION PLANNING ORGANIZATION TRAFFIC COUNTS: 2010 - 2019


ID	ROAD	SEGMENT (Sections)	2010 AADT	2011 AADT	2012 AADT	2013 AADT	2014 AADT	2015 AADT	2016 AADT	2017 AADT	2018 AADT	2019 AADT	Current MAV	Last Count Taken	Functional Classification
AREA: NORTH															
206	BARNA	SR 405-SR 50	5,470	5,200	4,770	4,770	4,930	5,160	5,540	5,920	NC	6,400	15,600	12/4/2019	Urban Major Collector
521	CAMP	GRISSOM-US 1	2,800	2,650	2,450	2,290	2,370	2,150	2,670	2,730	2,690	2,430	15,600	11/5/2019	Urban Major Collector
	CANAVERAL GROVES	PINE-US 1	7,310	4,640	7,020	4,365	6,760	4,360	7,290	4,620	7,680	5,260			
522	CITRUS	PINE-LEE	NC	3,710	NC	3,550	NC	3,380	NC	3,830	NC	4,500	15,600	10/30/2019	Urban Major Collector
212	CANAVERAL GROVES	LEE-GRISSOM	7,310	NC	7,020	NC	6,760	NC	7,290	NC	7,680	NC	15,600	11/6/2018	Urban Major Collector
213	CANAVERAL GROVES	GRISSOM-US 1	NC	5,570	NC	5,180	NC	5,340	NC	5,410	NC	6,020	15,600	12/4/2019	Urban Major Collector
	CARPENTER	FOX LAKE-SR 46	4,637	4,687	4,377	4,483	4,390	4,455	4,557	4,437	4,630	4,560			
188	CARPENTER	FOX LAKE-GARDEN	3,740	3,800	3,450	3,560	3,540	3,520	3,480	3,690	3,830	3,560	15,600	11/13/2019	Urban Major Collector
184	CARPENTER	GARDEN-DAIRY	5,220	5,230	4,890	4,970	4,960	5,390	5,390	5,410	5,400	5,450	15,600	11/6/2019	Urban Major Collector
183	CARPENTER	DAIRY-SR 46	4,950	5,030	4,790	4,920	4,670	NC	4,800	4,210	4,660	4,670	15,600	11/6/2019	Urban Major Collector
	DAIRY	CARPENTER-US 1	5,925	5,900	5,850	5,660	5,795	5,475	7,760	6,060	6,130	5,940			
185	DAIRY	CARPENTER-HOLDER	NC	5,300	NC	5,100	NC	4,820	NC	5,030	NC	5,270	15,600	11/5/2019	Urban Major Collector
523	DAIRY	HOLDER-SINGLETON	6,280	NC	6,180	NC	6,070	NC	7,760	NC	6,330	NC	15,600	11/7/2018	Urban Major Collector
186	DAIRY	SINGLETON-OLD DIXIE	NC	6,500	NC	6,220	NC	6,130	NC	6,930	NC	6,610	15,600	11/6/2019	Urban Major Collector
187	DAIRY	OLD DIXIE-US 1	5,570	NC	5,520	NC	5,520	NC	NC	6,220	5,930	NC	15,600	11/27/2018	Urban Major Collector
596	DEERING PARKWAY	I-95-US 1				1,870	1,720	2,090	2,470	2,470	2,530	2,720	14,200	11/6/2019	Rural Major Collector
	FAY	GOLFVIEW-GRISSOM	6,543	6,400	8,065	5,800	7,805	5,825	8,765	6,275	7,760	6,200			
549	FAY	GOLFVIEW-HOMESTEAD	2,660	2,740	NC	2,680	NC	2,880	NC	3,160	NC	3,120	15,600	11/5/2019	Urban Major Collector
207	FAY	HOMESTEAD-DEER	7,250	6,990	6,780	NC	6,460	NC	6,640	NC	6,740	NC	15,600	11/27/2018	Urban Major Collector
229	FAY	DEER-GRISSOM	9,720	9,470	9,350	8,920	9,150	8,770	10,890	9,390	8,780	9,280	15,600	11/5/2019	Urban Major Collector
	FAY	GRISSOM-US 1	14,555	14,965	13,975	13,730	13,670	13,590	14,465	14,280	14,380	14,325			
208	FAY	GRISSOM-AREQUIPPA	12,830	NC	12,380	NC	12,830	13,400	13,590	NC	13,090	NC	33,800	11/27/2018	Urban Major Collector
209	FAY	AREQUIPPA-CAROLE	NC	13,410	NC	12,230	NC	12,350	NC	12,860	NC	12,900	33,800	11/5/2019	Urban Major Collector
210	FAY	CAROLE-US 1	16,280	16,520	15,570	15,230	14,510	15,020	15,340	15,700	15,670	15,750	33,800	11/5/2019	Urban Major Collector
235	FOX LAKE	CARPENTER-SOUTH	4,250	NC	3,870	NC	NC	3,920	NC	NC	4,130	NC	17,700	11/27/2018	Urban Major Collector
	GRISSOM	INDUSTRY-PORT ST. JOHN PARKWAY	10,053	10,633	9,930	9,753	10,223	10,213	10,033	10,357	10,077	10,197			
197	GRISSOM	INDUSTRY-CANAVERAL GRVS	11,060	11,820	10,870	10,680	11,540	11,720	11,300	11,160	10,800	10,640	15,600	12/4/2019	Urban Minor Arterial
196	GRISSOM	CANAVERAL GRVS-CAMP	8,940	9,320	8,980	8,960	9,010	9,490	8,660	9,360	9,140	9,470	17,700	11/5/2019	Urban Minor Arterial
195	GRISSOM	CAMP-PORT ST. JOHN PARKWAY	10,160	10,760	9,940	9,620	10,120	9,430	10,140	10,550	10,290	10,480	17,700	11/5/2019	Urban Minor Arterial
	GRISSOM	PORT ST. JOHN PARKWAY-KINGS HWY	11,863	12,123	11,687	11,573	12,220	11,170	14,117	11,890	12,660	12,607			
194	GRISSOM	PORT ST. JOHN PARKWAY-BRIDGE	12,890	13,680	12,670	12,720	13,840	NC	14,940	13,920	14,150	14,550	17,700	11/5/2019	Urban Minor Arterial
193	GRISSOM	BRIDGE-FAY	11,290	11,750	11,380	12,130	12,390	12,740	13,700	12,070	12,670	12,990	17,700	11/5/2019	Urban Minor Arterial
192	GRISSOM	FAY-CURTIS	NC	10,940	NC	9,870	NC	9,600	NC	9,680	NC	10,280	15,600	11/5/2019	Urban Minor Arterial
191	GRISSOM	CURTIS-KINGS HIGHWAY	11,410	NC	11,010	NC	10,430	NC	13,710	NC	11,160	NC	15,600	11/27/2018	Urban Minor Arterial
	GRISSOM	KINGS HIGHWAY-SR 405	9,690	9,655	8,980	8,970	9,310	9,320	8,660	10,080	9,160	10,440			
190	GRISSOM	KINGS HIGHWAY-SHEPARD	10,010	9,890	NC	8,970	NC	9,320	NC	10,080	NC	10,440	30,400	11/5/2019	Rural Minor Arterial
189	GRISSOM	SHEPARD-SR 405	9,370	9,420	8,980	NC	9,310	NC	8,620	NC	9,160	NC	39,800	11/6/2018	Urban Minor Arterial
524	GOLFVIEW	PORT ST. JOHN PKWY-FAY	4,640	NC	4,610	NC	4,830	NC	NC	5,570	5,680	NC	15,600	11/6/2018	Urban Major Collector
526	HOLDER	DAIRY-SR 46	NC	2,720	NC	2,670	NC	NC	NC	2,840	NC	2,730	17,700	11/6/2019	Urban Major Collector
	HOPKINS	SR 50-GRACE		9,670	7,640	8,390	6,770	8,995	7,765	7,765	8,995	7,715			
583	HOPKINS	SR 50-KNOX MCRAE				6,970	7,130	NC	7,190	NC	7,420	NC	15,600	11/13/2018	Urban Minor Arterial
584	HOPKINS	KNOX MCREA-COUNTRY CLUB DR				9,640	NC	9,090	NC	10,710	NC	10,380	15,600	11/6/2019	Urban Minor Arterial
577	HOPKINS	COUNTRY CLUB DR-HARRISON		9,670		9,400	9,650	NC	10,800	NC	10,570	NC	15,600	11/13/2018	Urban Minor Arterial
586	HOPKINS	HARRISON-GRACE				4,550	NC	4,450	NC	4,820	NC	5,050	15,600	11/6/2019	Urban Minor Arterial
198	INDUSTRY	SR 524-GRISSOM	15,940	16,170	15,900	16,040	18,530	18,030	18,430	17,560	18,700	20,700	41,790	10/30/2019	Urban Minor Arterial
594	INDUSTRY	GRISSOM-CIDCO RD					4,360	NC	4,700	4,590	4,840	4,570	15,600	10/30/2019	Urban Local
245	KINGS HWY	GRISSOM-US 1	NC	4,710	NC	4,300	NC	4,060	NC	5,060	NC	5,200	15,600	11/5/2019	Urban Major Collector
223	NASA CSWY	US 1-SPACE COMMERCE WAY	13,870	12,060	11,200	10,520	11,110	10,170	12,070	12,260	13,400	14,380	30,400	11/5/2019	Rural Principal Arterial Other

*Note: 2016 AADT's Beaches area were counted twice in 2016 and the AADT listed is the average of the two counts.
NC=Not Counted; UC=Under Construction


APPENDIX B

Intersection Traffic Counts & Adjustments Factors

Day: Wednesday
Date: 08/26/2020

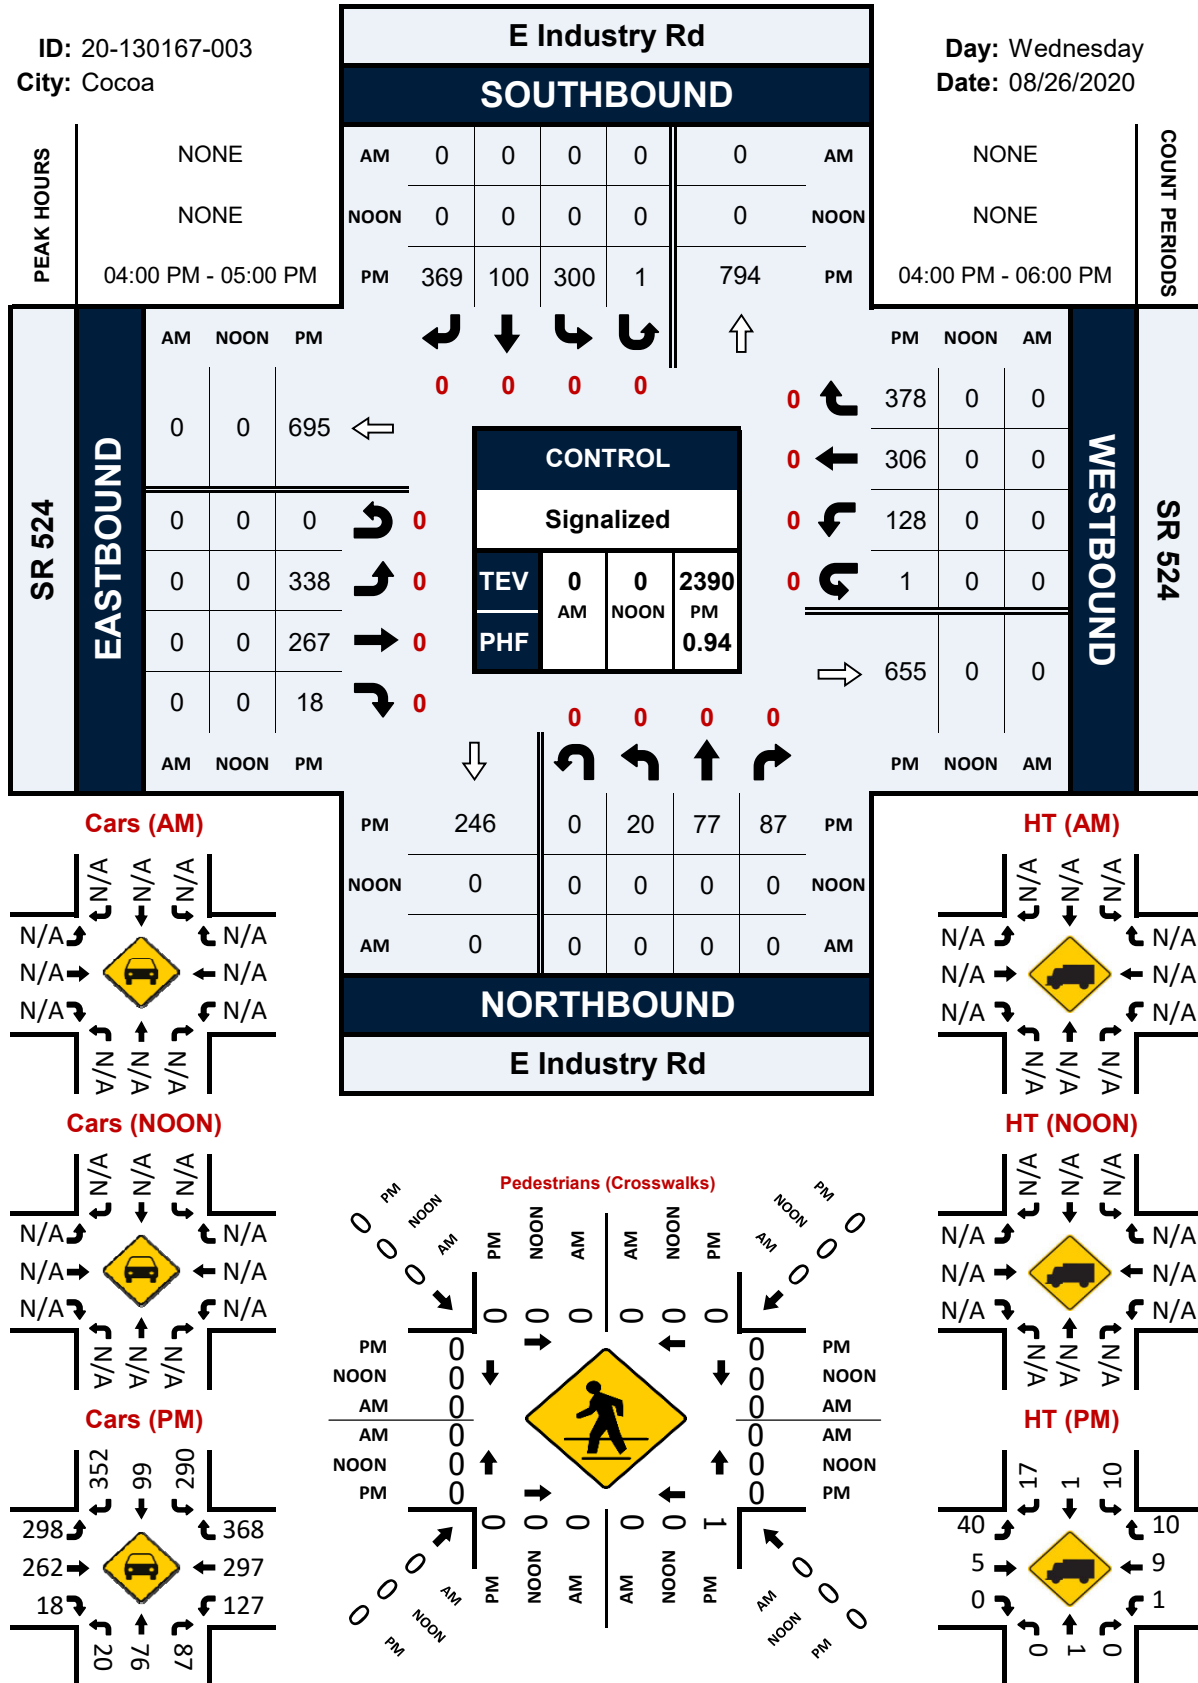

PROJECT ID: 20-130167-003
DATE: 08/26/2020

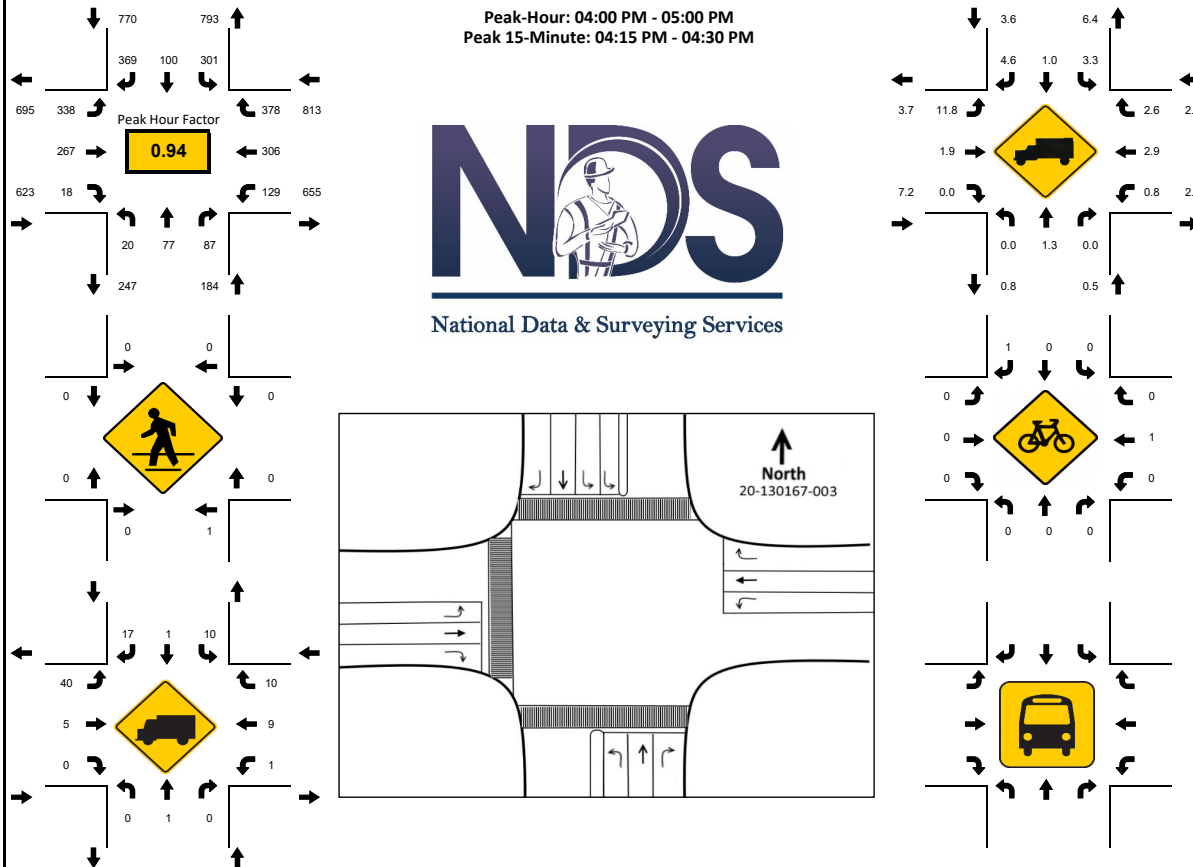[illegible]




National Data & Surveying Services



N/S Street: **E Industry Rd**

Speed: **45 MPH**

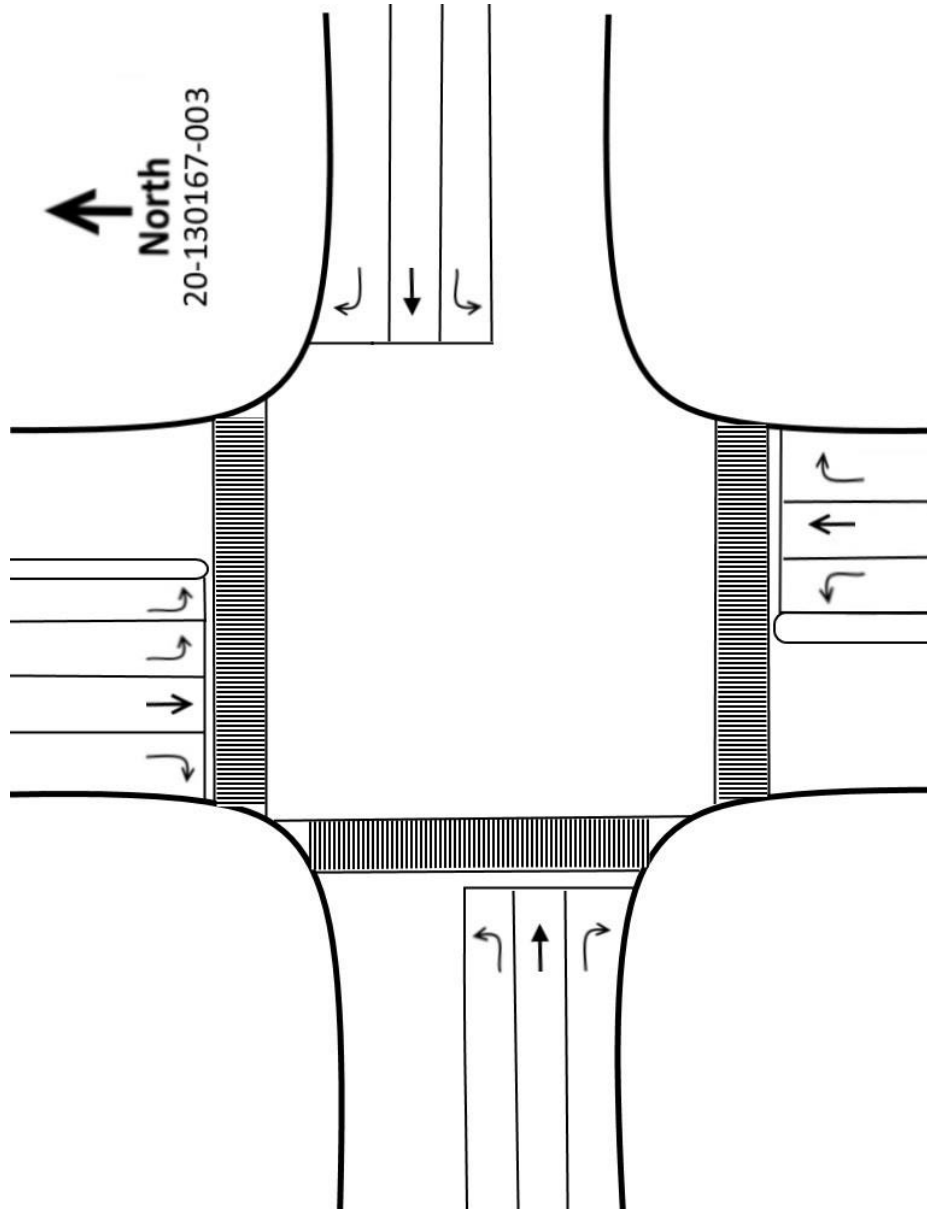

E/W Street: **SR 524**

Speed: **55 MPH**

Site Code: **20-130167-003**

Date: **08/26/2020**

Weather: **Sunny**

City: **Cocoa**

County: **Brevard**

Count Times: **16:00 - 18:00**

Control: **Signalized**

SIGNAL TIMING


PHASES	1	2	3
NL/SL	-	00:17	00:18
SL/ST	00:27	00:14	00:13
NT/ST	00:24	00:21	00:17
EL/WL	00:20	-	00:25
EL/ET	-	00:49	00:12
WL/WT	00:03	-	-
ET/WT	00:23	00:36	00:44

CVS Pharmacy Entrance/Cocoa Veterinary Hospital Dwy & SR 524


Peak Hour Turning Movement Count

ID: 20-130167-002
City: Cocoa

Day: Wednesday
Date: 08/26/2020

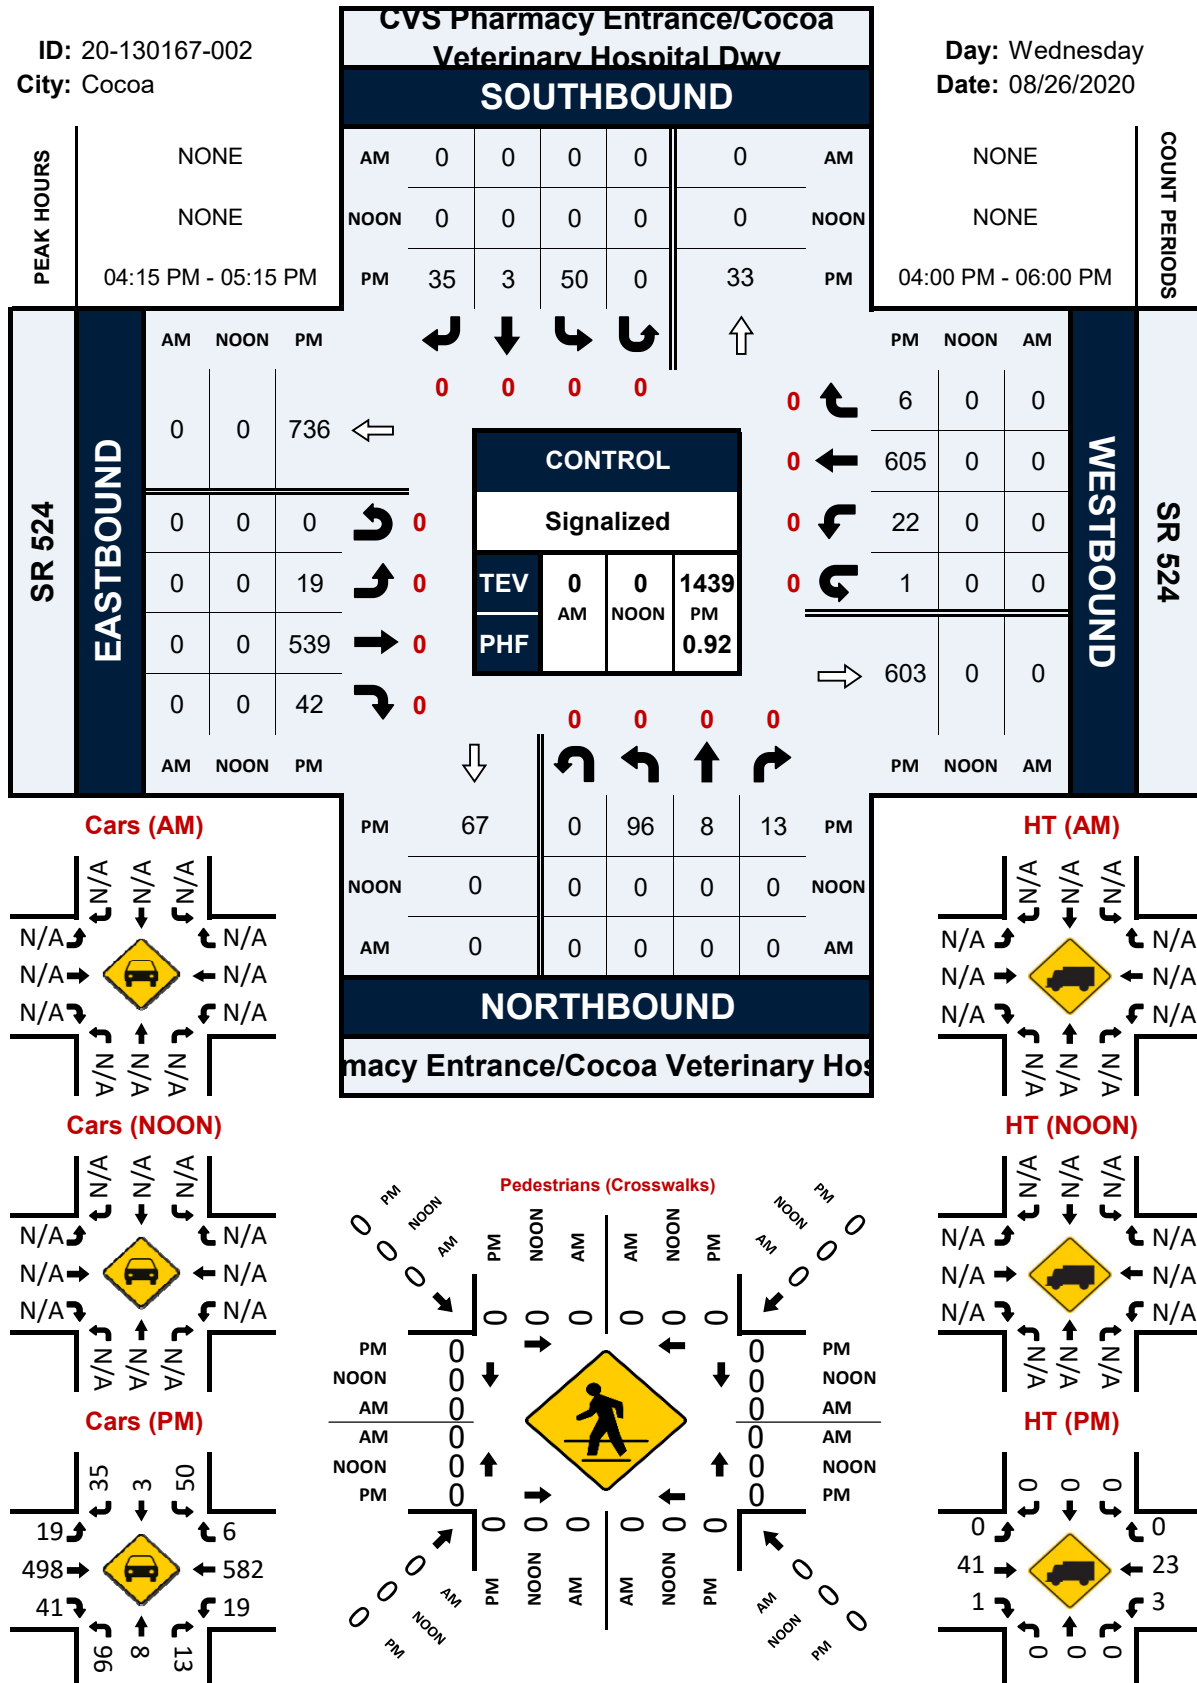

PROJECT ID: 20-130167-002
DATE: 08/26/2020

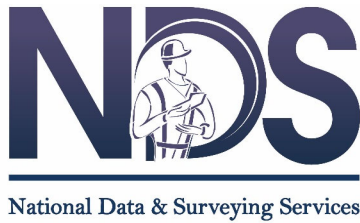[illegible]




National Data & Surveying Services



N/S Street: **CVS Pharmacy Entrance/Cocoa Veterinary Hospital Dwy** Speed: **N/A**


E/W Street: **SR 524** Speed: **55 MPH**

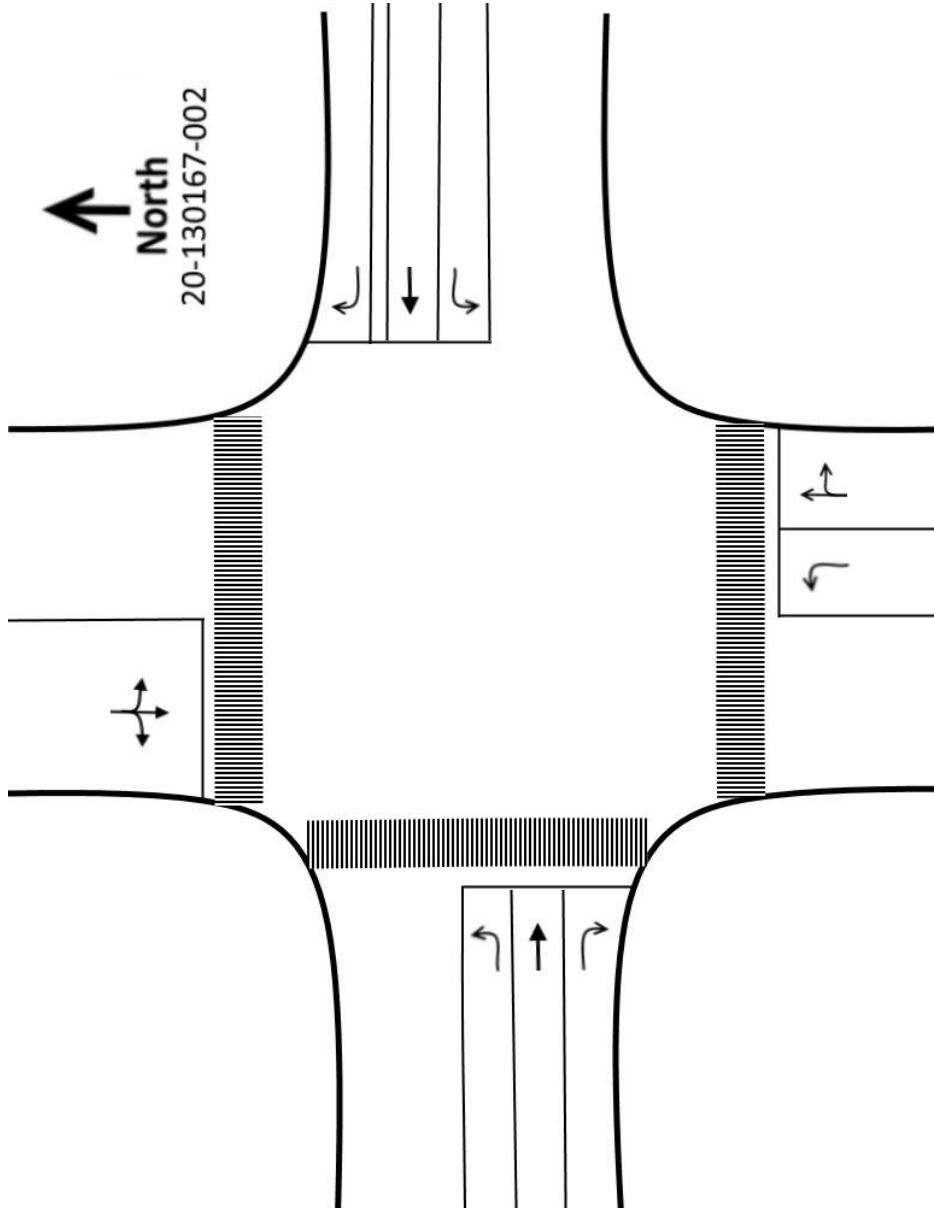



Site Code: **20-130167-002**
Date: **08/26/2020**
Weather: **Sunny**
City: **Cocoa**
County: **Brevard**
Count Times: **16:00 - 18:00**
Control: **Signalized**

SIGNAL TIMING

PHASES	1	2	3
NT/ST	00:23	00:24	00:16
WL/WT	-	-	00:13
ET/WT	01:07	01:09	01:08

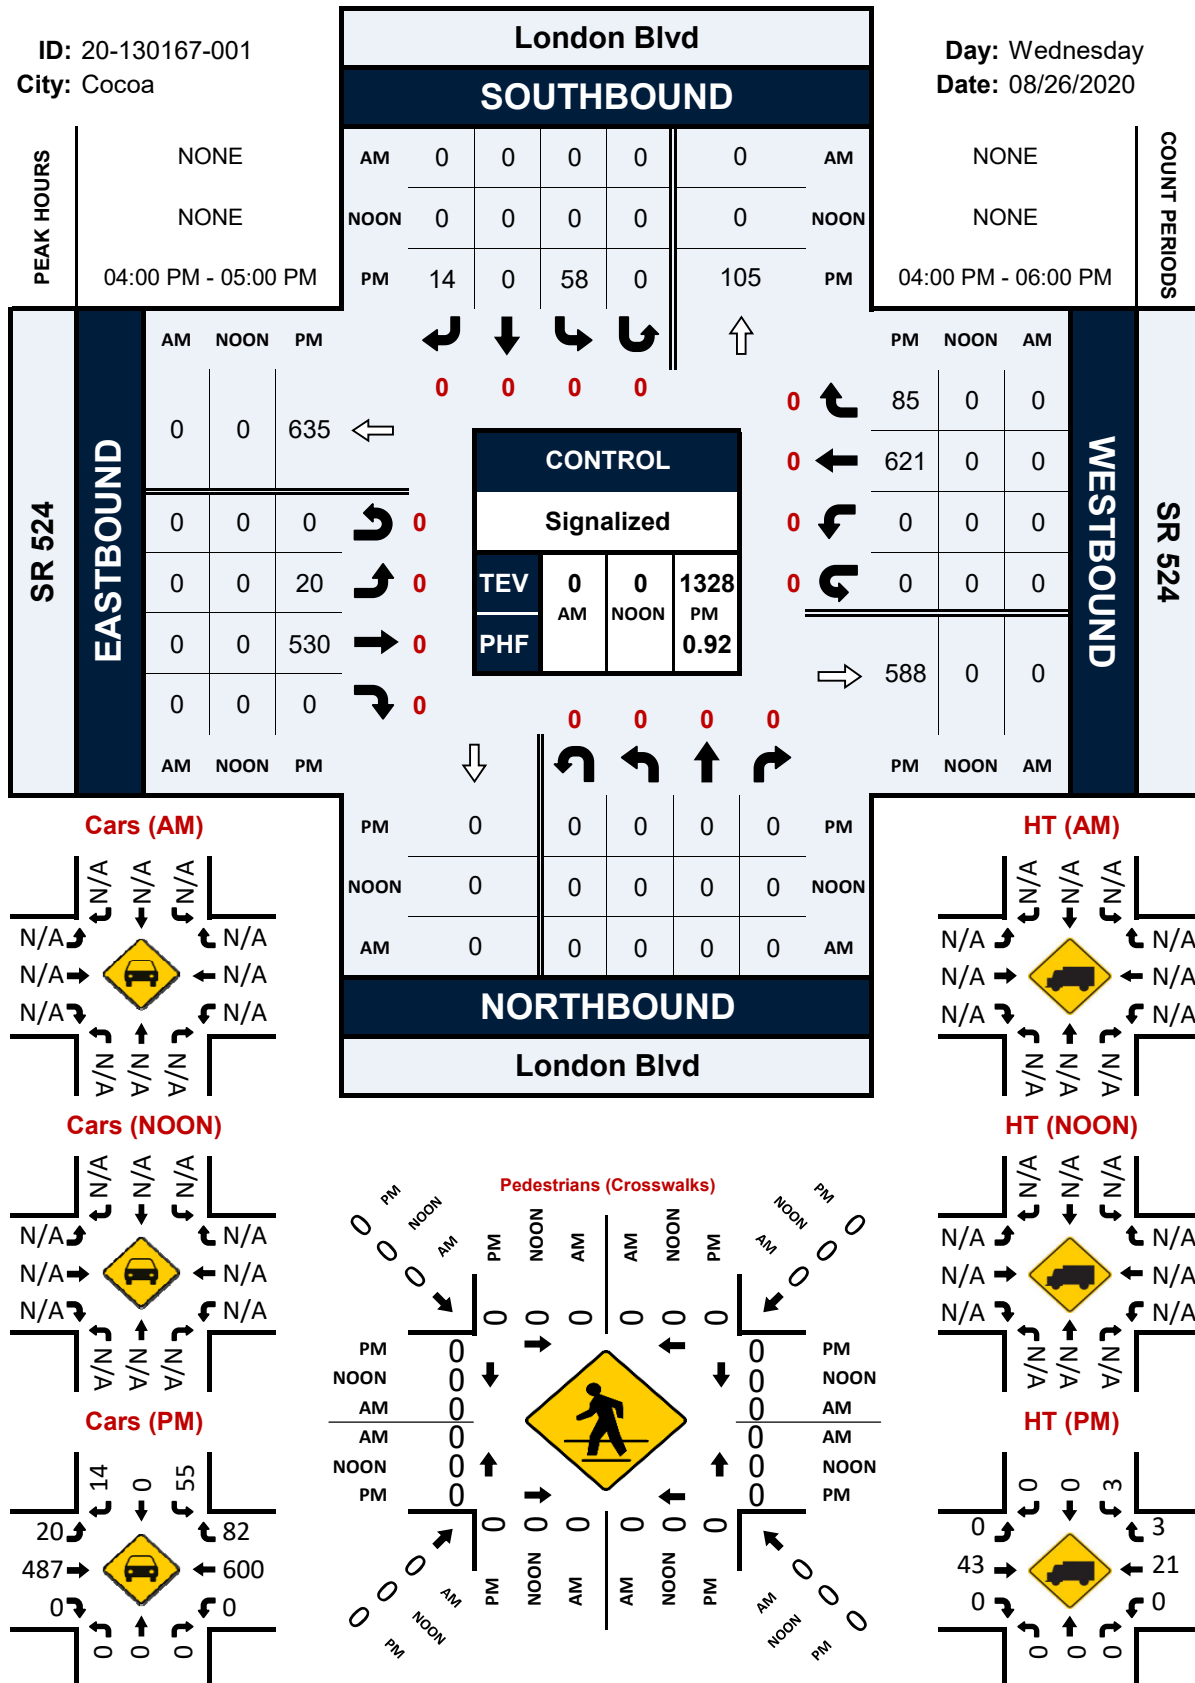

PROJECT ID: 20-130167-001
DATE: 08/26/2020

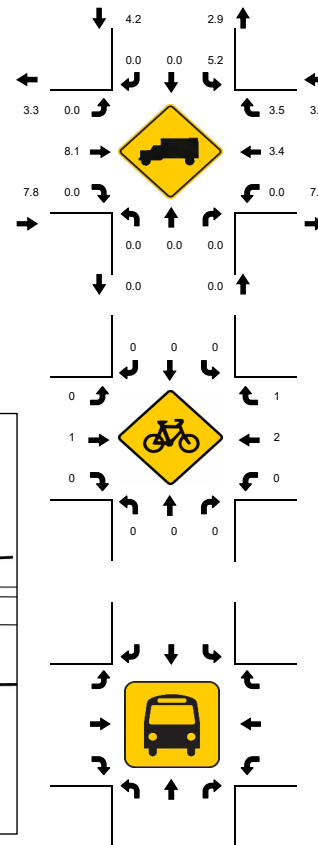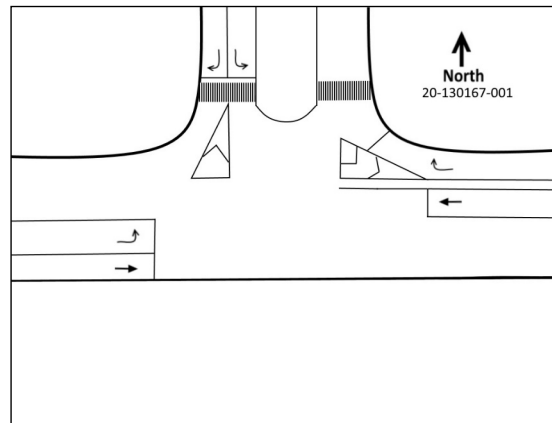[illegible]




National Data & Surveying Services



N/S Street: **London Blvd**

Speed: **25 MPH**

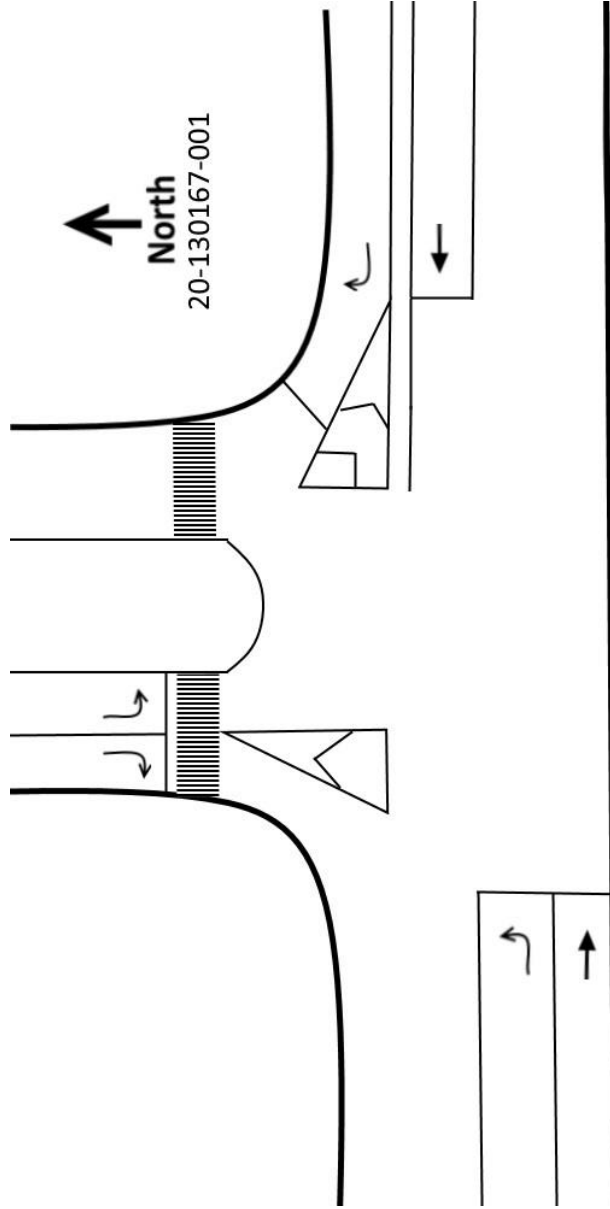

E/W Street: **SR 524**

Speed: **55 MPH**

Site Code: **20-130167-001**

Date: **08/26/2020**

Weather: **Sunny**

City: **Cocoa**

County: **Brevard**

Count Times: **16:00 - 18:00**

Control: **Signalized**

SIGNAL TIMING

PHASES	1	2	3
SL/SR	00:23	00:20	00:17
ET/WT	02:38	00:44	02:00

2019 PEAK SEASON FACTOR CATEGORY REPORT - REPORT TYPE: ALL
 CATEGORY: 7000 BREVARD COUNTYWIDE

WEEK	DATES	SF	MOCF: 0.91 PSCF
1	01/01/2019 - 01/05/2019	1.03	1.13
2	01/06/2019 - 01/12/2019	1.00	1.10
3	01/13/2019 - 01/19/2019	0.97	1.07
4	01/20/2019 - 01/26/2019	0.96	1.05
* 5	01/27/2019 - 02/02/2019	0.94	1.03
* 6	02/03/2019 - 02/09/2019	0.92	1.01
* 7	02/10/2019 - 02/16/2019	0.90	0.99
* 8	02/17/2019 - 02/23/2019	0.90	0.99
* 9	02/24/2019 - 03/02/2019	0.89	0.98
* 10	03/03/2019 - 03/09/2019	0.88	0.97
* 11	03/10/2019 - 03/16/2019	0.88	0.97
* 12	03/17/2019 - 03/23/2019	0.89	0.98
* 13	03/24/2019 - 03/30/2019	0.90	0.99
* 14	03/31/2019 - 04/06/2019	0.91	1.00
* 15	04/07/2019 - 04/13/2019	0.92	1.01
* 16	04/14/2019 - 04/20/2019	0.93	1.02
* 17	04/21/2019 - 04/27/2019	0.94	1.03
18	04/28/2019 - 05/04/2019	0.96	1.05
19	05/05/2019 - 05/11/2019	0.98	1.08
20	05/12/2019 - 05/18/2019	0.99	1.09
21	05/19/2019 - 05/25/2019	1.01	1.11
22	05/26/2019 - 06/01/2019	1.02	1.12
23	06/02/2019 - 06/08/2019	1.03	1.13
24	06/09/2019 - 06/15/2019	1.05	1.15
25	06/16/2019 - 06/22/2019	1.05	1.15
26	06/23/2019 - 06/29/2019	1.05	1.15
27	06/30/2019 - 07/06/2019	1.05	1.15
28	07/07/2019 - 07/13/2019	1.05	1.15
29	07/14/2019 - 07/20/2019	1.06	1.16
30	07/21/2019 - 07/27/2019	1.06	1.16
31	07/28/2019 - 08/03/2019	1.07	1.18
32	08/04/2019 - 08/10/2019	1.08	1.19
33	08/11/2019 - 08/17/2019	1.08	1.19
34	08/18/2019 - 08/24/2019	1.10	1.21
35	08/25/2019 - 08/31/2019	1.11	1.22
36	09/01/2019 - 09/07/2019	1.12	1.23
37	09/08/2019 - 09/14/2019	1.13	1.24
38	09/15/2019 - 09/21/2019	1.14	1.25
39	09/22/2019 - 09/28/2019	1.12	1.23
40	09/29/2019 - 10/05/2019	1.10	1.21
41	10/06/2019 - 10/12/2019	1.07	1.18
42	10/13/2019 - 10/19/2019	1.05	1.15
43	10/20/2019 - 10/26/2019	1.05	1.15
44	10/27/2019 - 11/02/2019	1.04	1.14
45	11/03/2019 - 11/09/2019	1.04	1.14
46	11/10/2019 - 11/16/2019	1.03	1.13
47	11/17/2019 - 11/23/2019	1.03	1.13
48	11/24/2019 - 11/30/2019	1.03	1.13
49	12/01/2019 - 12/07/2019	1.03	1.13
50	12/08/2019 - 12/14/2019	1.03	1.13
51	12/15/2019 - 12/21/2019	1.03	1.13
52	12/22/2019 - 12/28/2019	1.00	1.10
53	12/29/2019 - 12/31/2019	0.97	1.07

* PEAK SEASON

14-FEB-2020 15:39:28

830UPD

5_7000_PKSEASON.TXT

Covid Factor

Sta 435	ADT	27,000
Sta 434	ADT	22,100

From Synopsis Report @ Sta 434

PM Peak Hour = 1,584 vph

$$SF_{Factor} = 1.10 \rightarrow 1,584 \times 1.10 = 1,742 \text{ vph}$$

$$K = 1,742 / 22,100 = 0.0788$$


$$\text{PM Peak Hour Count @ Sta 435} = 0.0788 \times 27,000 = 2,128 \text{ vph}$$

$$\text{Covid Factor} = 2,128 / 1,736 = 1.23$$

2020 Count

SR 525

Clearlake Rd

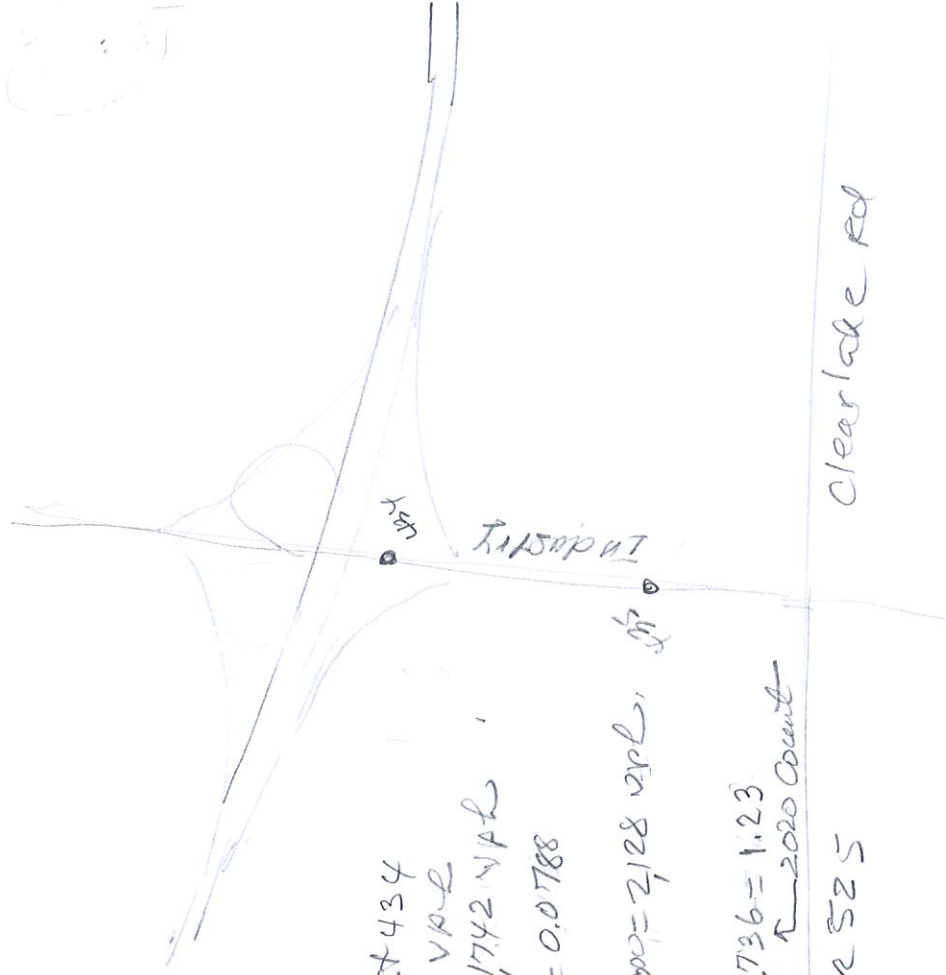

COUNTY: 70
STATION: 0434
DESCRIPTION: ON SR-524, 0.232 MI. N OF SR-501 (UV)
START DATE: 08/21/2019
START TIME: 0000

		DIRECTION: N				DIRECTION: S				COMBINED	
TIME	1ST	2ND	3RD	4TH	TOTAL	1ST	2ND	3RD	4TH	TOTAL	TOTAL
0000	28	29	16	27	100	7	15	18	18	58	158
0100	33	6	10	8	57	17	11	19	22	69	126
0200	8	8	7	13	36	18	7	9	14	48	84
0300	15	10	14	26	65	8	18	18	19	63	128
0400	23	21	32	41	117	22	21	36	25	104	221
0500	36	43	52	65	196	40	41	77	95	253	449
0600	58	82	96	106	342	90	125	152	205	572	914
0700	111	95	107	109	422	190	255	261	315	1021	1443
0800	103	110	133	125	471	224	216	273	265	978	1449
0900	98	108	107	104	417	212	198	162	191	763	1180
1000	133	101	106	139	479	178	162	182	170	692	1171
1100	105	108	99	118	430	152	199	172	176	699	1129
1200	128	136	110	143	517	234	200	181	180	795	1312
1300	136	134	143	127	540	174	204	174	155	707	1247
1400	124	107	104	103	438	174	201	214	198	787	1225
1500	142	124	141	177	584	228	213	272	250	963	1547
1600	144	157	151	159	611	214	244	248	233	939	1550
1700	168	137	159	143	607	262	265	227	223	977	1584
1800	126	107	99	95	427	183	159	136	119	597	1024
1900	92	103	79	86	360	130	115	109	98	452	812
2000	89	84	75	57	305	81	103	90	73	347	652
2100	50	40	44	30	164	49	50	65	36	200	364
2200	39	37	27	24	127	31	45	35	26	137	264
2300	21	19	28	14	82	25	28	23	15	91	173
24-HOUR TOTALS:					7894						12312 20206


		DIRECTION: N		DIRECTION: S	
		HOUR	VOLUME	HOUR	VOLUME
A.M.	800		471		1483
P.M.	1615		635		1623
DAILY	1615		635		1623

APPENDIX C

Existing HCS Capacity Worksheets

HCS7 Signalized Intersection Results Summary

General Information					Intersection Information	
Agency	TPD, Inc.			Duration, h	0.25	
Analyst	BH		Analysis Date	8/28/2020	Area Type	Other
Jurisdiction	Brevard County		Time Period	P.M. Peak Existing	PHF	0.94
Urban Street	SR 524		Analysis Year	2020	Analysis Period	1> 7:00
Intersection	SR 524 & Industry Rd		File Name	SR 524 & Industry Rd.xus		
Project Description	Cocoa Apartment					



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (v), veh/h	461	364	25	39	418	517	27	106	119	410	137	504

Signal Information														
Cycle, s	106.1	Reference Phase	2											
Offset, s	0	Reference Point	End											
Uncoordinated	Yes	Simult. Gap E/W	On	Green	4.2	6.4	26.0	3.4	8.1	21.9				
				Yellow	4.0	4.0	4.0	4.0	4.0	4.0				
Force Mode	Fixed	Simult. Gap N/S	On	Red	2.0	2.0	2.0	2.0	2.0	2.0				

1	2	3	4
5	6	7	8


Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	1	6	5	2	7	4	3	8
Case Number	2.0	3.0	2.0	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	22.7	44.4	10.2	32.0	9.4	27.9	23.5	42.0
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Max Allow Headway (MAH), s	4.9	5.0	4.9	5.0	5.0	5.2	5.0	5.2
Queue Clearance Time (g_s), s	16.5	19.3	4.4	28.0	3.7	9.2	14.6	37.0
Green Extension Time (g_e), s	0.2	9.1	0.0	0.0	0.0	6.5	3.0	0.0
Phase Call Probability	1.00	1.00	0.71	1.00	0.57	1.00	1.00	1.00
Max Out Probability	1.00	0.28	1.00	1.00	1.00	0.03	0.00	1.00

Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	1	6	16	5	2	12	7	4	14	3	8	18
Adjusted Flow Rate (v), veh/h	490	387	27	41	445	550	29	113	127	436	146	536
Adjusted Saturation Flow Rate (s), veh/h/ln	1757	1900	1610	1810	1900		1810	1900	1610	1757	1900	1610
Queue Service Time (g_s), s	14.5	17.3	1.1	2.4	24.5		1.7	5.3	7.2	12.6	5.8	35.0
Cycle Queue Clearance Time (g_c), s	14.5	17.3	1.1	2.4	24.5		1.7	5.3	7.2	12.6	5.8	35.0
Green Ratio (g/C)	0.16	0.36	0.36	0.04	0.25		0.03	0.21	0.21	0.17	0.34	0.34
Capacity (c), veh/h	552	688	583	72	466		58	392	333	580	645	546
Volume-to-Capacity Ratio (X)	0.888	0.563	0.046	0.574	0.955		0.491	0.287	0.381	0.752	0.226	0.981
Back of Queue (Q), ft/ln (95 th percentile)	289	296.4	18.3	55.3	520.5		39.2	109.6	126.6	232.4	115	621.2
Back of Queue (Q), veh/ln (95 th percentile)	11.6	11.9	0.7	2.2	20.8		1.6	4.4	5.1	9.3	4.6	24.8
Queue Storage Ratio (RQ) (95 th percentile)	0.00	0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00	0.00
Uniform Delay (d_1), s/veh	43.8	27.1	21.9	50.0	39.5		50.5	35.5	36.2	42.2	25.1	34.7
Incremental Delay (d_2), s/veh	16.1	1.1	0.0	9.9	30.6		8.8	0.6	1.0	2.8	0.3	33.7
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (d), s/veh	59.9	28.2	22.0	59.9	70.1	0.0	59.3	36.1	37.3	45.0	25.3	68.4
Level of Service (LOS)	E	C	C	E	E	A	E	D	D	D	C	E
Approach Delay, s/veh / LOS	45.2	D		32.5		C	39.1	D		53.7	D	
Intersection Delay, s/veh / LOS	43.6						D					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.11	B	2.45	B	2.30	B	2.28	B
Bicycle LOS Score / LOS	1.98	B	2.20	B	0.93	A	2.33	B

HCS7 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	TPD, Inc.			Duration, h	0.25
Analyst	BH	Analysis Date	8/28/2020	Area Type	Other
Jurisdiction	Brevard County	Time Period	P.M. Peak Existing	PHF	0.92
Urban Street	SR 524	Analysis Year	2020	Analysis Period	1> 7:00
Intersection	SR 524 & CVS Entrance	File Name	SR 524 & CVS Entrance.xus		
Project Description	Cocoa Apartment				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (v), veh/h	26	736	58	30	827	9	132	11	17	69	4	48

Signal Information												
Cycle, s	115.1	Reference Phase	2									
Offset, s	0	Reference Point	End									
Uncoordinated	Yes	Simult. Gap E/W	On	Green	3.6	0.3	65.2	11.3	10.7	0.0		
				Yellow	4.0	0.0	4.0	4.0	4.0	0.0		
Force Mode	Fixed	Simult. Gap N/S	On	Red	2.0	0.0	2.0	2.0	2.0	0.0		

													
1	2	3	4	5	6	7	8	9	10	11	12	13	14

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	1	6	5	2		4		8
Case Number	2.0	3.0	2.0	3.0		10.0		12.0
Phase Duration, s	9.6	71.2	9.9	71.5		17.3		16.7
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0		6.0		6.0
Max Allow Headway (MAH), s	4.9	4.9	4.9	4.9		5.0		5.1
Queue Clearance Time (g_s), s	3.8	38.4	4.0	46.6		11.0		10.6
Green Extension Time (g_e), s	0.0	17.2	0.0	18.8		0.4		0.3
Phase Call Probability	0.60	1.00	0.65	1.00		1.00		0.99
Max Out Probability	1.00	0.24	1.00	0.13		0.56		0.44

Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	1	6	16	5	2	12	7	4	14	3	8	18
Adjusted Flow Rate (v), veh/h	28	800	63	33	899	10	143	30			132	
Adjusted Saturation Flow Rate (s), veh/h/ln	1810	1900	1610	1810	1900	1610	1810	1713			1727	
Queue Service Time (g_s), s	1.8	36.4	2.0	2.0	44.6	0.3	9.0	1.9			8.6	
Cycle Queue Clearance Time (g_c), s	1.8	36.4	2.0	2.0	44.6	0.3	9.0	1.9			8.6	
Green Ratio (g/C)	0.03	0.57	0.57	0.03	0.57	0.57	0.10	0.10			0.09	
Capacity (c), veh/h	56	1076	912	61	1081	916	178	168			161	
Volume-to-Capacity Ratio (X)	0.502	0.743	0.069	0.533	0.831	0.011	0.807	0.181			0.815	
Back of Queue (Q), ft/ln (95 th percentile)	41.6	511.6	29.6	47.7	609.3	4.4	202.9	36.8			190.8	
Back of Queue (Q), veh/ln (95 th percentile)	1.7	20.5	1.2	1.9	24.4	0.2	8.1	1.5			7.6	
Queue Storage Ratio (RQ) (95 th percentile)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			0.00	
Uniform Delay (d_1), s/veh	55.0	18.7	11.3	54.8	20.3	10.8	50.9	47.7			51.3	
Incremental Delay (d_2), s/veh	9.5	2.2	0.0	9.9	2.8	0.0	13.2	0.7			13.9	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			0.0	
Control Delay (d), s/veh	64.5	20.9	11.3	64.7	23.1	10.8	64.1	48.4			65.2	
Level of Service (LOS)	E	C	B	E	C	B	E	D			E	
Approach Delay, s/veh / LOS	21.6		C	24.4		C	61.4		E	65.2		E
Intersection Delay, s/veh / LOS	28.7						C					


Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	1.89	B	1.67	B	2.14	B	2.16	B
Bicycle LOS Score / LOS	1.96	B	2.04	B	0.77	A	0.70	A

HCS7 Signalized Intersection Results Summary

General Information

Agency	TPD, Inc.		
Analyst	BH	Analysis Date	8/28/2020
Jurisdiction	Brevard County	Time Period	P.M. Peak Existing
Urban Street	SR 524	Analysis Year	2020
Intersection	SR 524 & London Blvd	File Name	SR 524 & London
Project Description	Cocoa Apartment		

Intersection Information



Demand Information

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (v), veh/h	27	723			847	116				79		20

Signal Information

Cycle, s	73.7	Reference Phase	2									
Offset, s	0	Reference Point	End									
Uncoordinated	Yes	Simult. Gap E/W	On	Green	2.7	47.7	5.3	0.0	0.0	0.0		
Force Mode	Fixed	Simult. Gap N/S	On	Yellow	4.0	4.0	4.0	0.0	0.0	0.0		
				Red	2.0	2.0	2.0	0.0	0.0	0.0		

Timer Results

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	1	6		2				8
Case Number	1.0	4.0		7.3				9.0
Phase Duration, s	8.7	62.4		53.7				11.3
Change Period, ($Y+R_c$), s	6.0	6.0		6.0				6.0
Max Allow Headway (MAH), s	4.9	4.9		4.9				5.1
Queue Clearance Time (g_s), s	2.4	14.2		26.5				5.4
Green Extension Time (g_e), s	0.0	20.6		21.1				0.3
Phase Call Probability	0.45	1.00		1.00				0.89
Max Out Probability	1.00	0.11		0.08				0.01

Movement Group Results

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	1	6			2	12				3		18
Adjusted Flow Rate (v), veh/h	29	786			921	126				86		22
Adjusted Saturation Flow Rate (s), veh/h/ln	1810	1900			1900					1810		
Queue Service Time (g_s), s	0.4	12.2			24.5					3.4		
Cycle Queue Clearance Time (g_c), s	0.4	12.2			24.5					3.4		
Green Ratio (g/C)	0.71	0.76			0.65					0.07		
Capacity (c), veh/h	359	1453			1229					131		
Volume-to-Capacity Ratio (X)	0.082	0.541			0.749					0.655		
Back of Queue (Q), ft/ln (95 th percentile)	5.2	57.3			257.4					75.1		
Back of Queue (Q), veh/ln (95 th percentile)	0.2	2.3			10.3					3.0		
Queue Storage Ratio (RQ) (95 th percentile)	0.00	0.00			0.00					0.00		
Uniform Delay (d_1), s/veh	8.1	3.5			8.9					33.3		
Incremental Delay (d_2), s/veh	0.1	0.4			1.3					7.6		
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0					0.0		
Control Delay (d), s/veh	8.3	3.9			10.3	0.0				41.0		0.0
Level of Service (LOS)	A	A			B	A				D		A
Approach Delay, s/veh / LOS	4.1	A		9.0	A		0.0			32.7		C
Intersection Delay, s/veh / LOS	8.3						A					

Multimodal Results

	EB			WB			NB			SB		
Pedestrian LOS Score / LOS	0.63	A		1.86	B		1.95	B		1.95	B	
Bicycle LOS Score / LOS	1.83	B		2.21	B						F	

APPENDIX D

ITE Trip Generation Sheets

Multifamily Housing (Low-Rise) (220)


Vehicle Trip Ends vs: Dwelling Units
On a: Weekday

Setting/Location: General Urban/Suburban
Number of Studies: 29
Avg. Num. of Dwelling Units: 168
Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
7.32	4.45 - 10.97	1.31

Data Plot and Equation

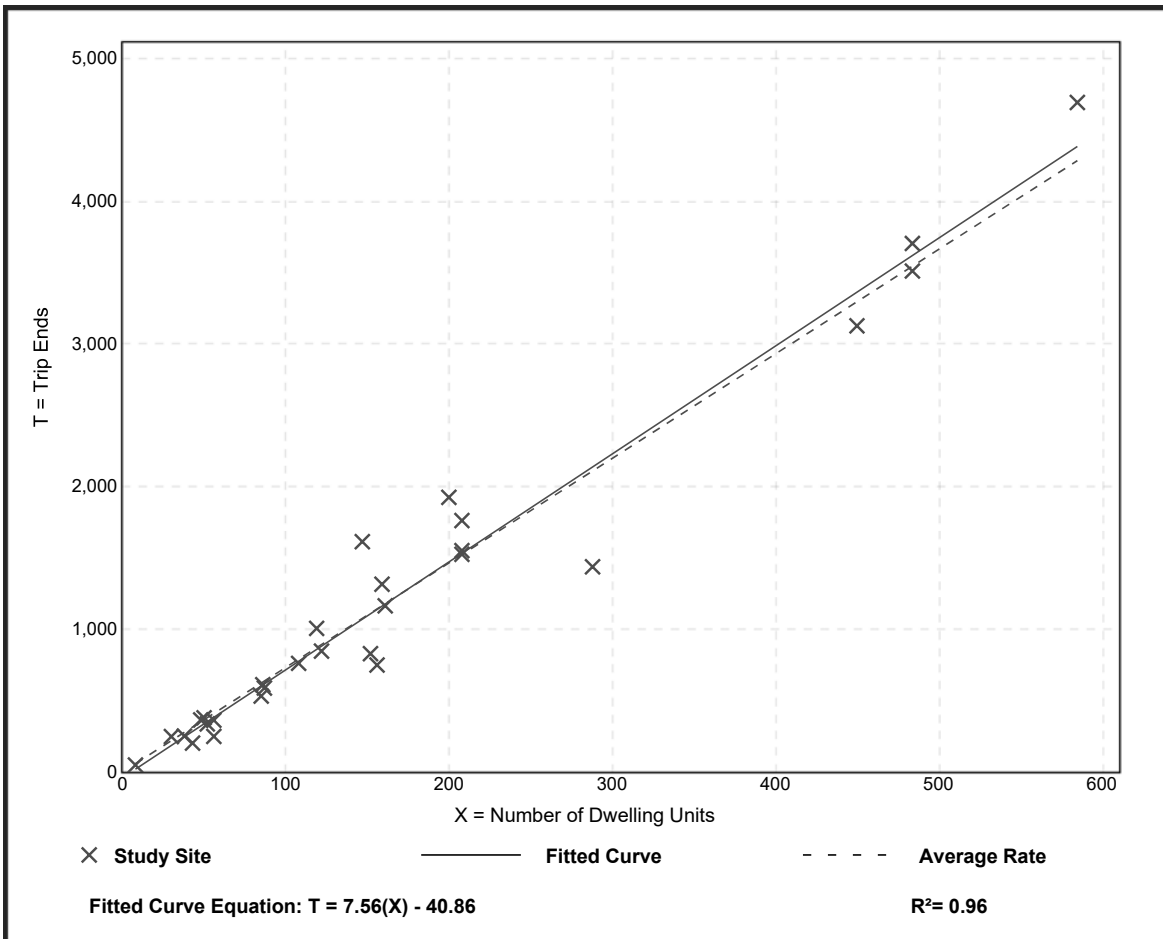

Multifamily Housing (Low-Rise) (220)

Vehicle Trip Ends vs: Dwelling Units

**On a: Weekday,
Peak Hour of Adjacent Street Traffic,
One Hour Between 7 and 9 a.m.**

Setting/Location: General Urban/Suburban

Number of Studies: 42


Avg. Num. of Dwelling Units: 199

Directional Distribution: 23% entering, 77% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
0.46	0.18 - 0.74	0.12

Data Plot and Equation

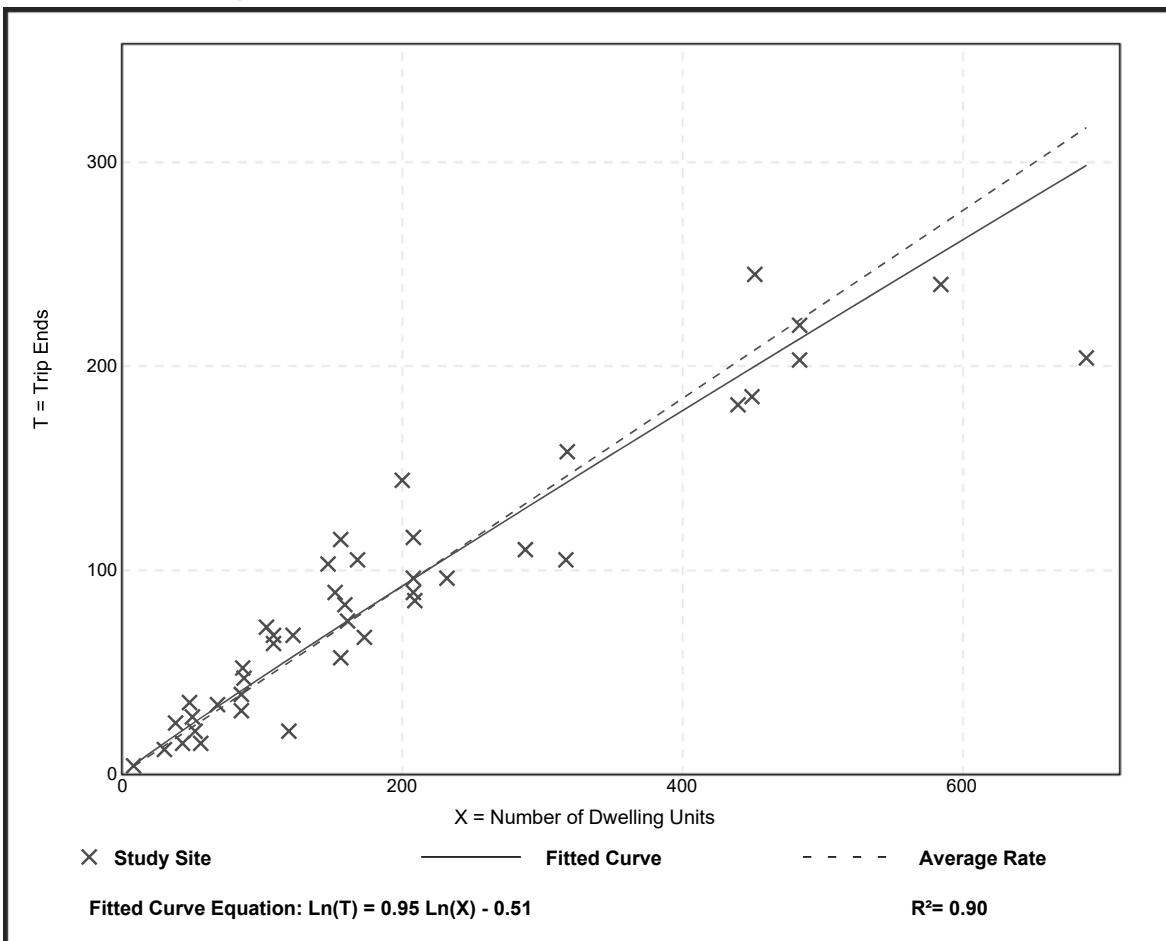

Multifamily Housing (Low-Rise) (220)

Vehicle Trip Ends vs: Dwelling Units

On a: Weekday,
Peak Hour of Adjacent Street Traffic,
One Hour Between 4 and 6 p.m.

Setting/Location: General Urban/Suburban

Number of Studies: 50


Avg. Num. of Dwelling Units: 187

Directional Distribution: 63% entering, 37% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
0.56	0.18 - 1.25	0.16

Data Plot and Equation

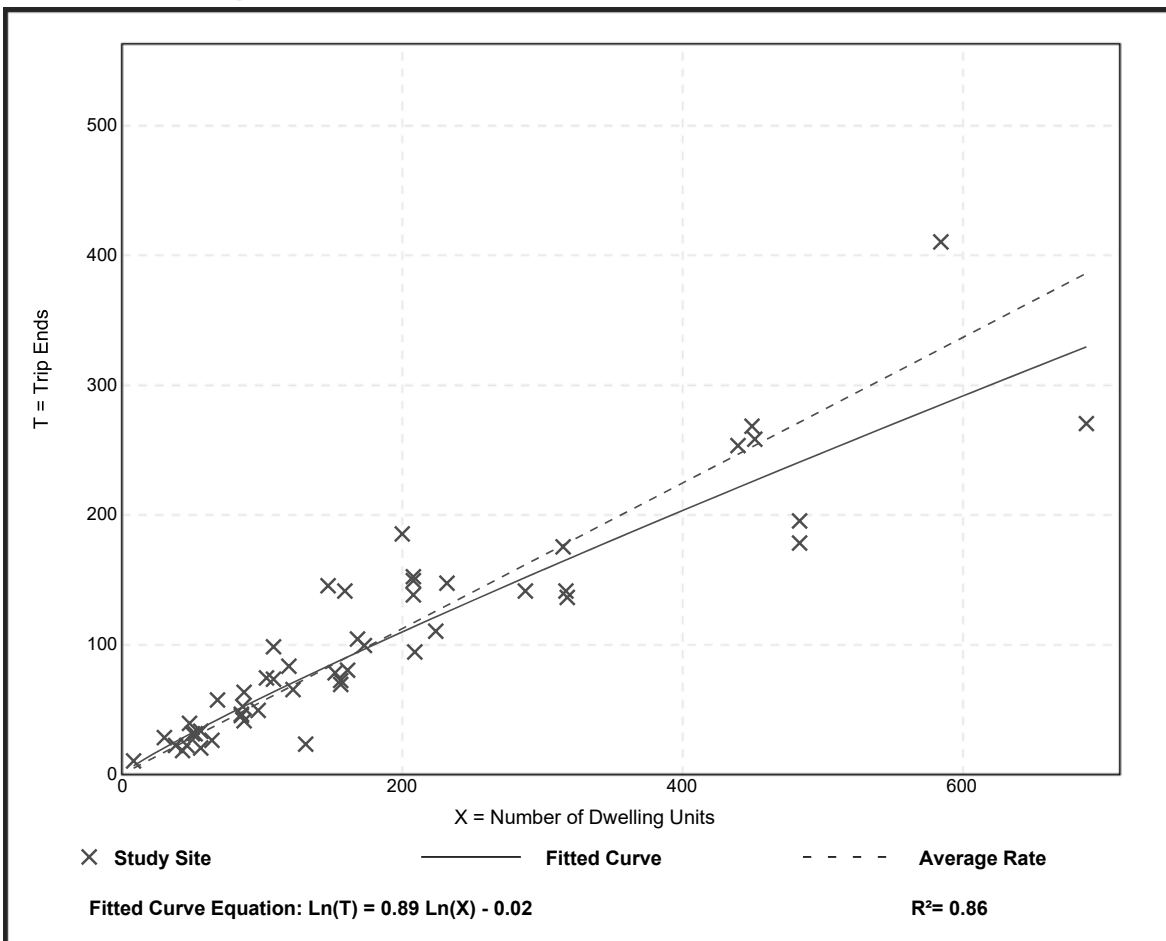

Shopping Center (820)


Vehicle Trip Ends vs: 1000 Sq. Ft. GLA
On a: Weekday

Setting/Location: General Urban/Suburban
Number of Studies: 147
Avg. 1000 Sq. Ft. GLA: 453
Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per 1000 Sq. Ft. GLA

Average Rate	Range of Rates	Standard Deviation
37.75	7.42 - 207.98	16.41

Data Plot and Equation

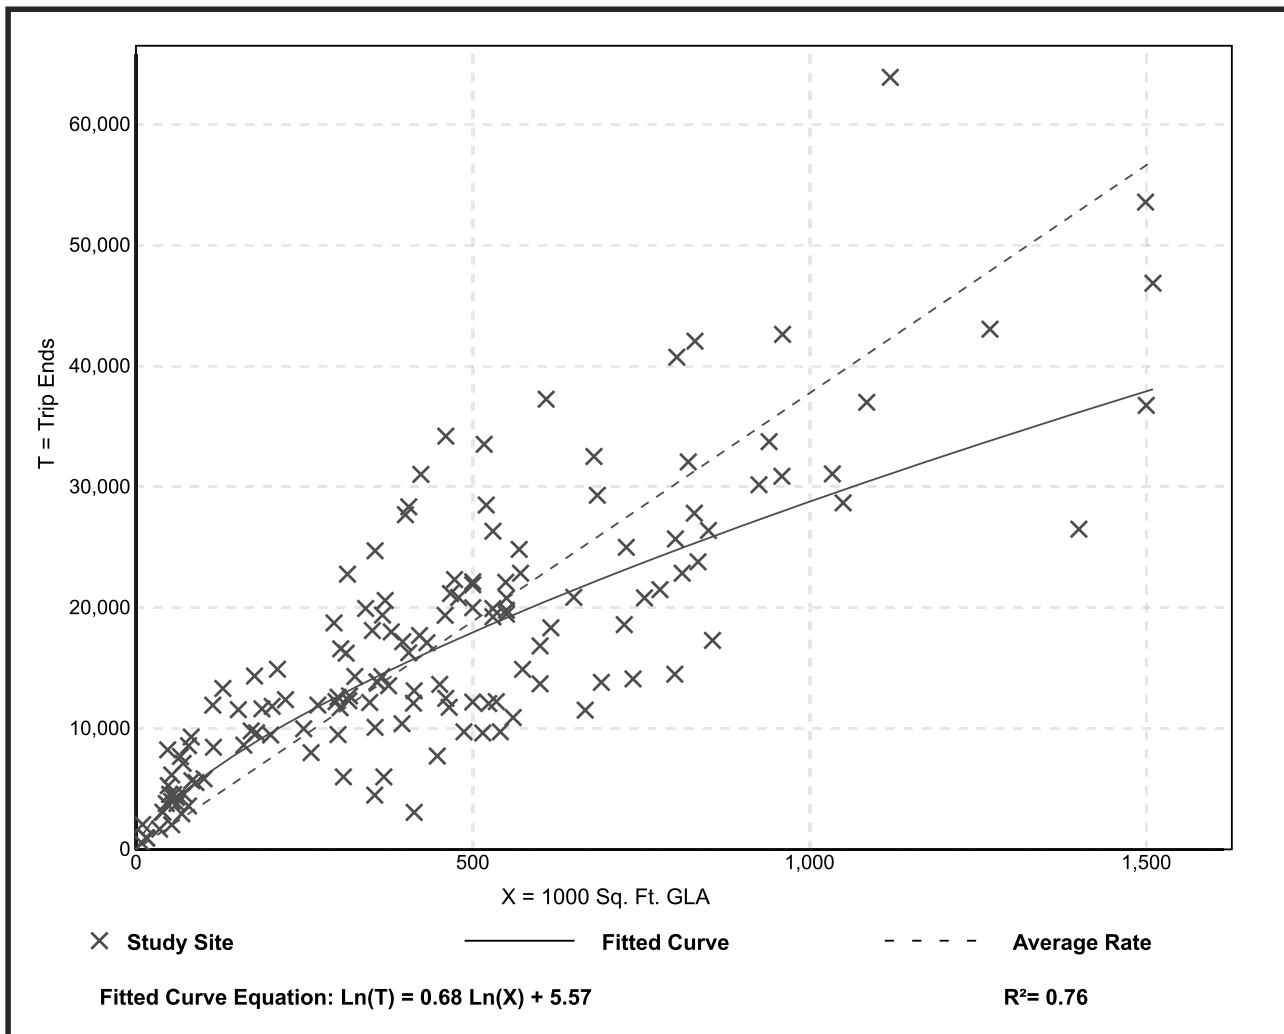


Shopping Center (820)

Vehicle Trip Ends vs: 1000 Sq. Ft. GLA
 On a: Weekday,
 Peak Hour of Adjacent Street Traffic,
 One Hour Between 7 and 9 a.m.
 Setting/Location: General Urban/Suburban
 Number of Studies: 84
 Avg. 1000 Sq. Ft. GLA: 351
 Directional Distribution: 62% entering, 38% exiting

Vehicle Trip Generation per 1000 Sq. Ft. GLA

Average Rate	Range of Rates	Standard Deviation
0.94	0.18 - 23.74	0.87

Data Plot and Equation

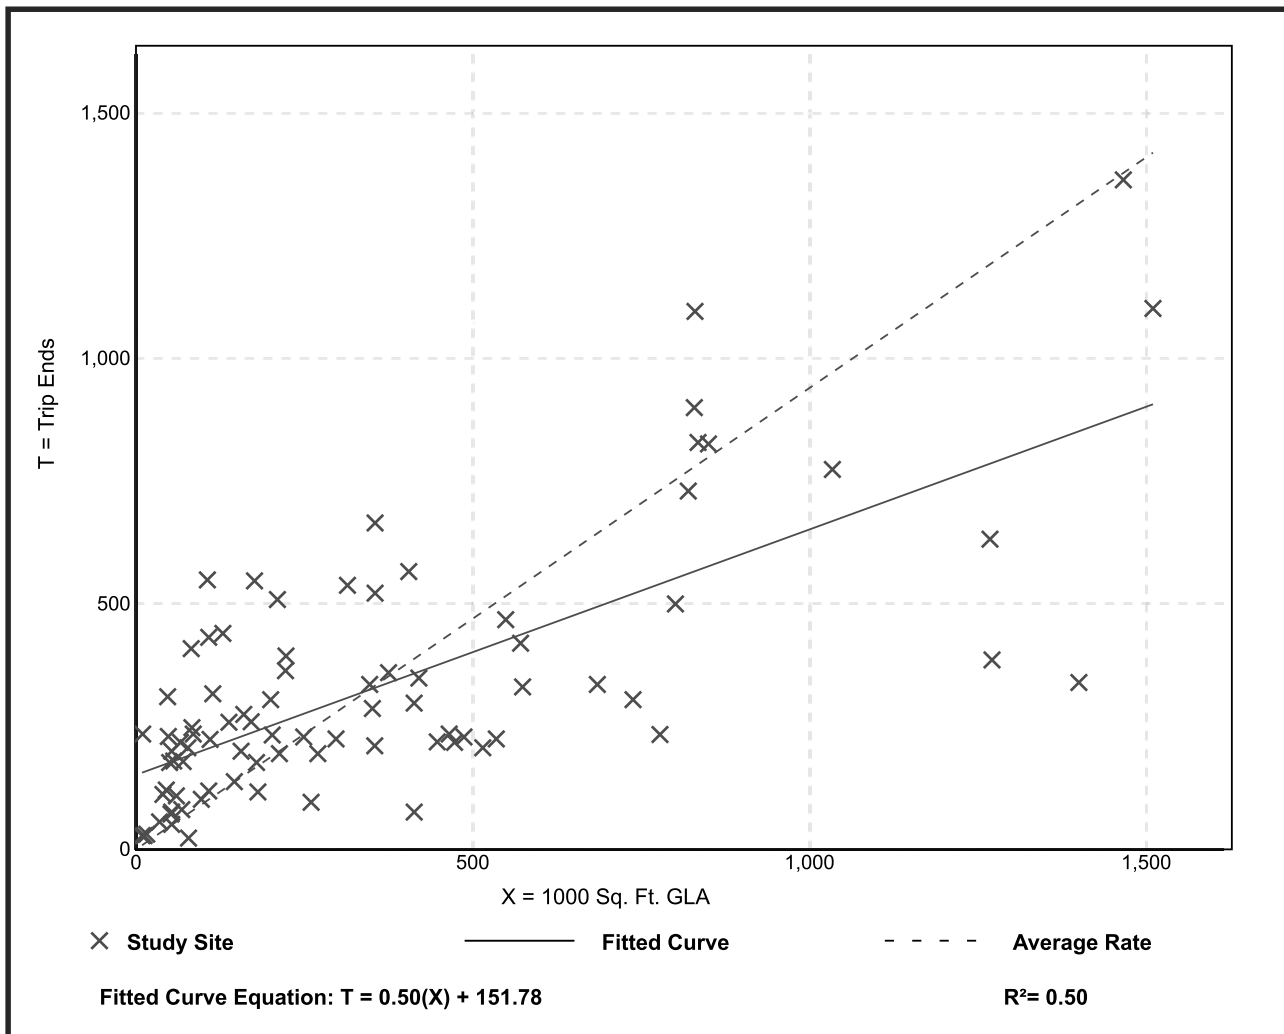


Shopping Center (820)

Vehicle Trip Ends vs: 1000 Sq. Ft. GLA
 On a: Weekday,
 Peak Hour of Adjacent Street Traffic,
 One Hour Between 4 and 6 p.m.
 Setting/Location: General Urban/Suburban
 Number of Studies: 261
 Avg. 1000 Sq. Ft. GLA: 327
 Directional Distribution: 48% entering, 52% exiting

Vehicle Trip Generation per 1000 Sq. Ft. GLA

Average Rate	Range of Rates	Standard Deviation
3.81	0.74 - 18.69	2.04


Data Plot and Equation

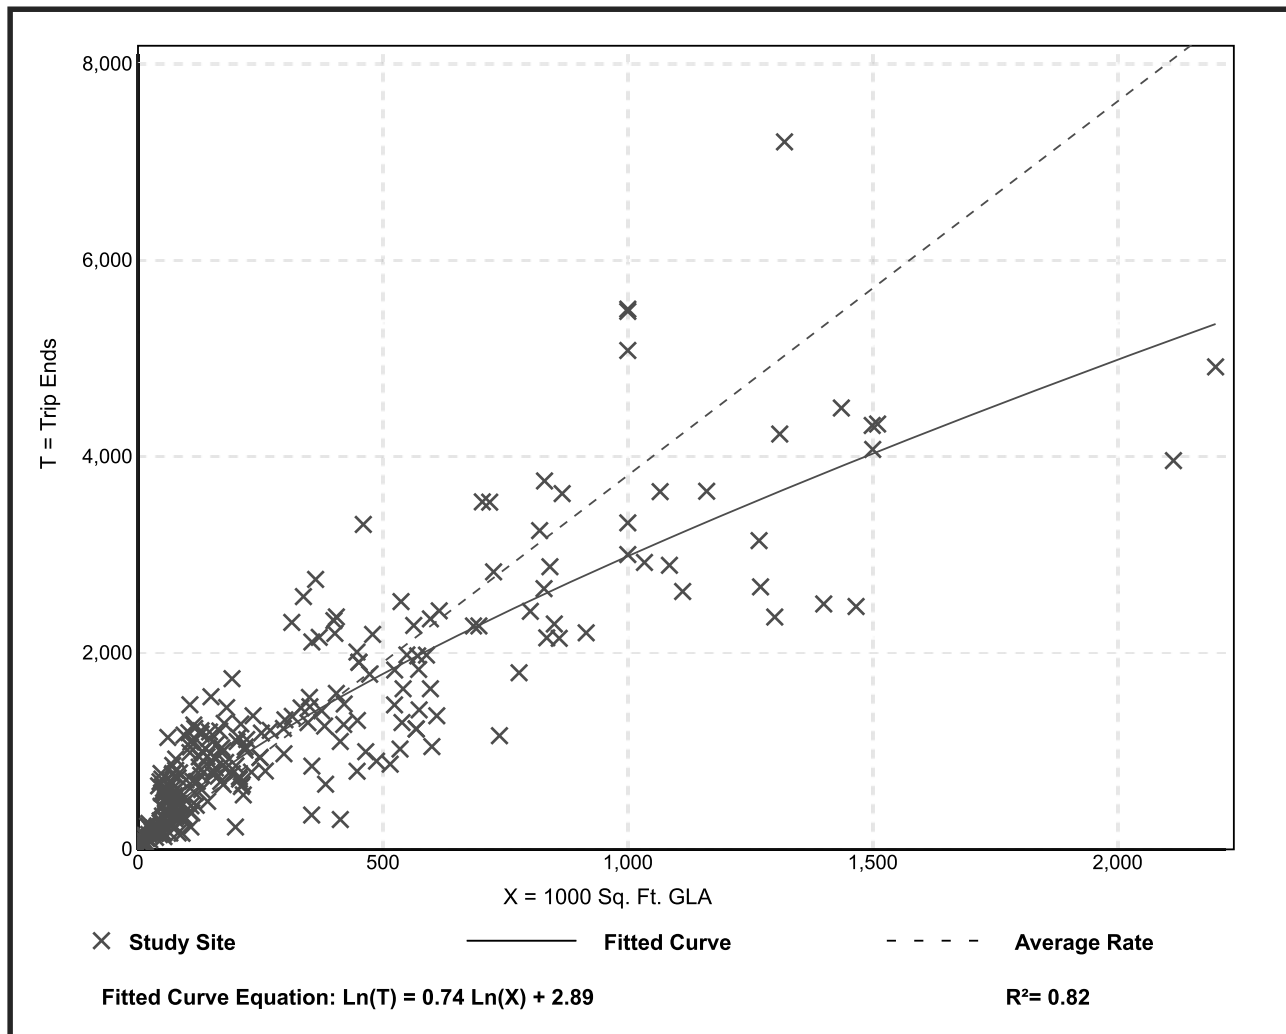



APPENDIX E

Model Distribution Plot

Cocoa Apartments
P5382

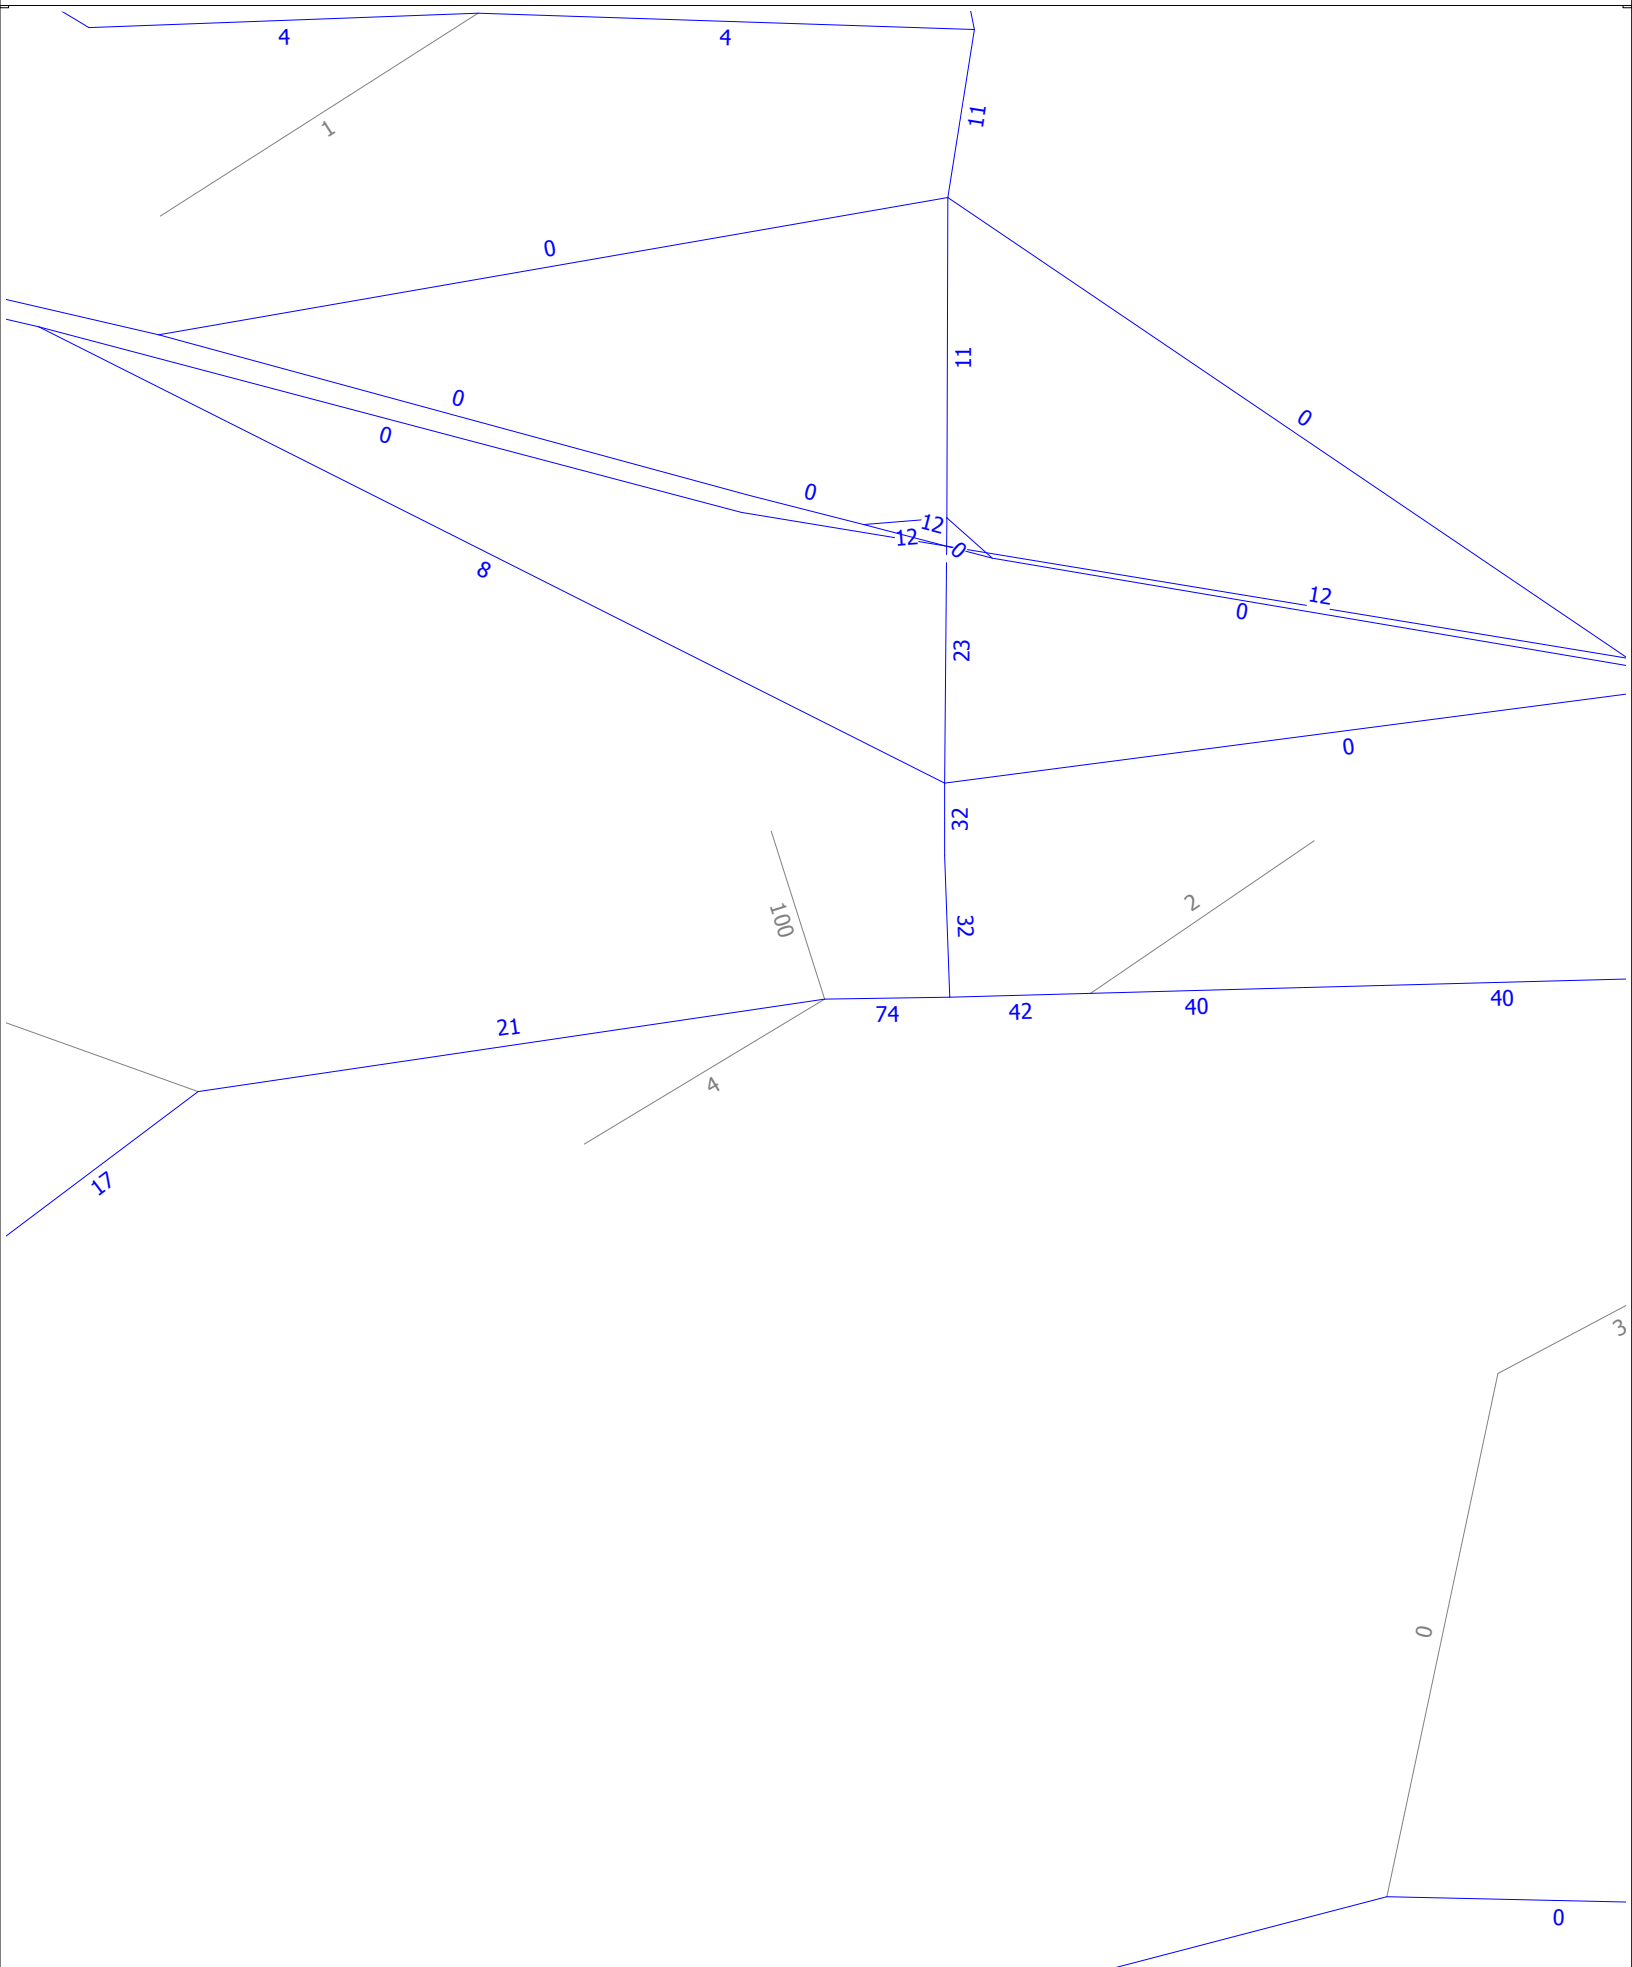

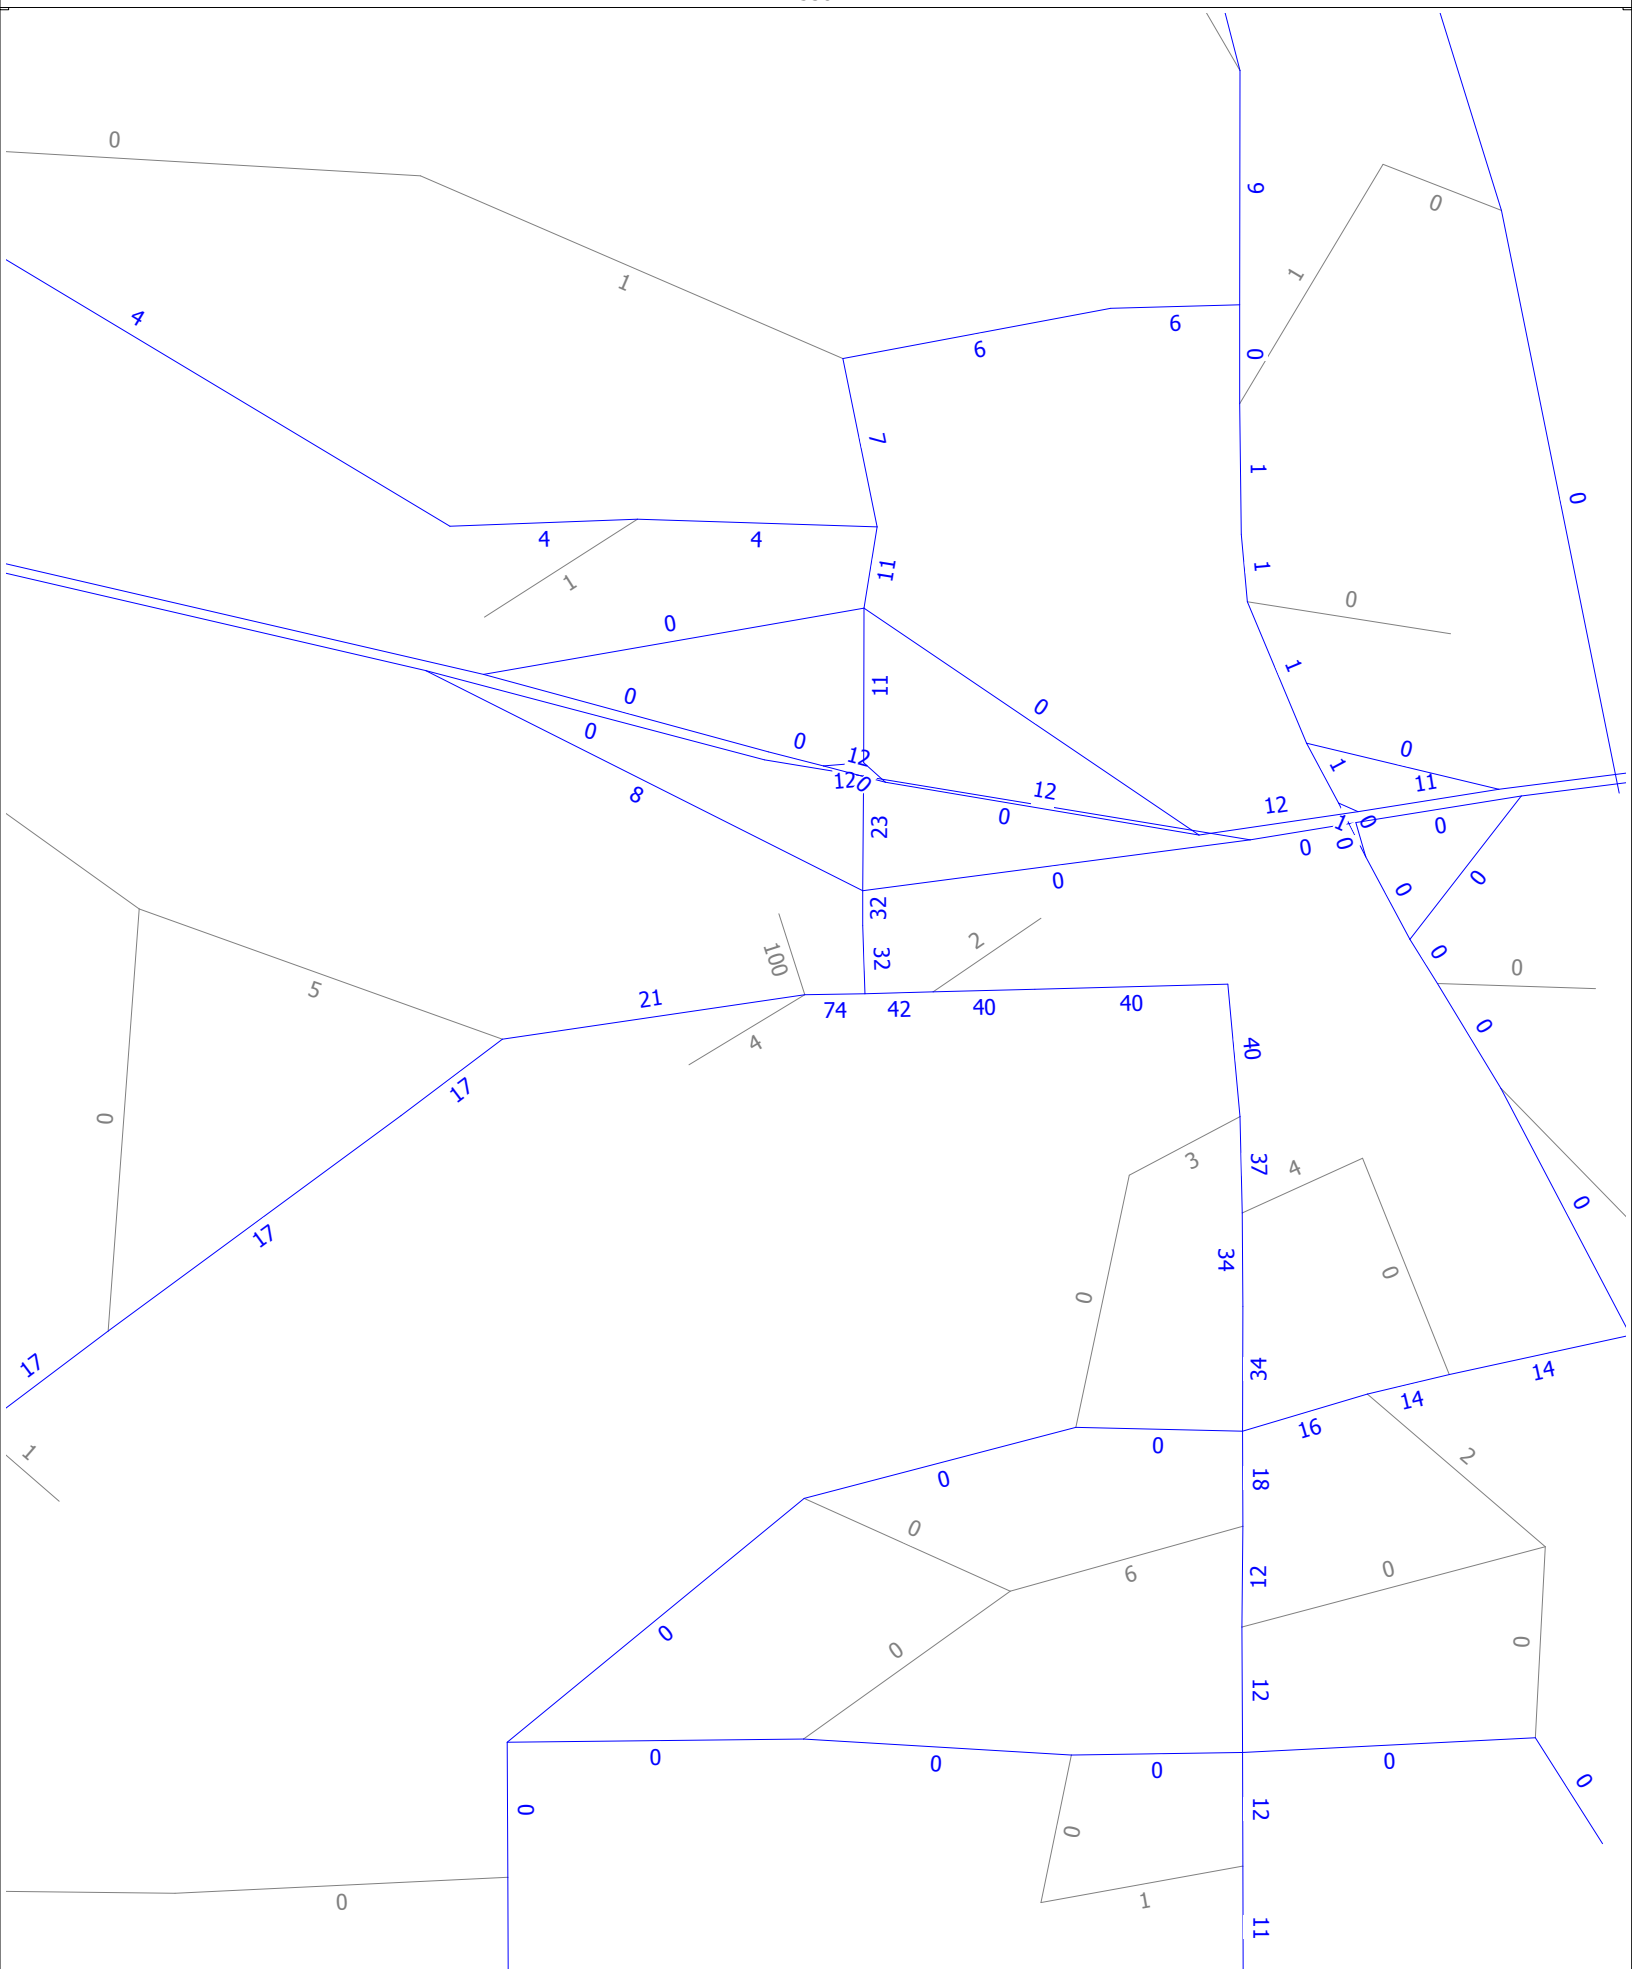

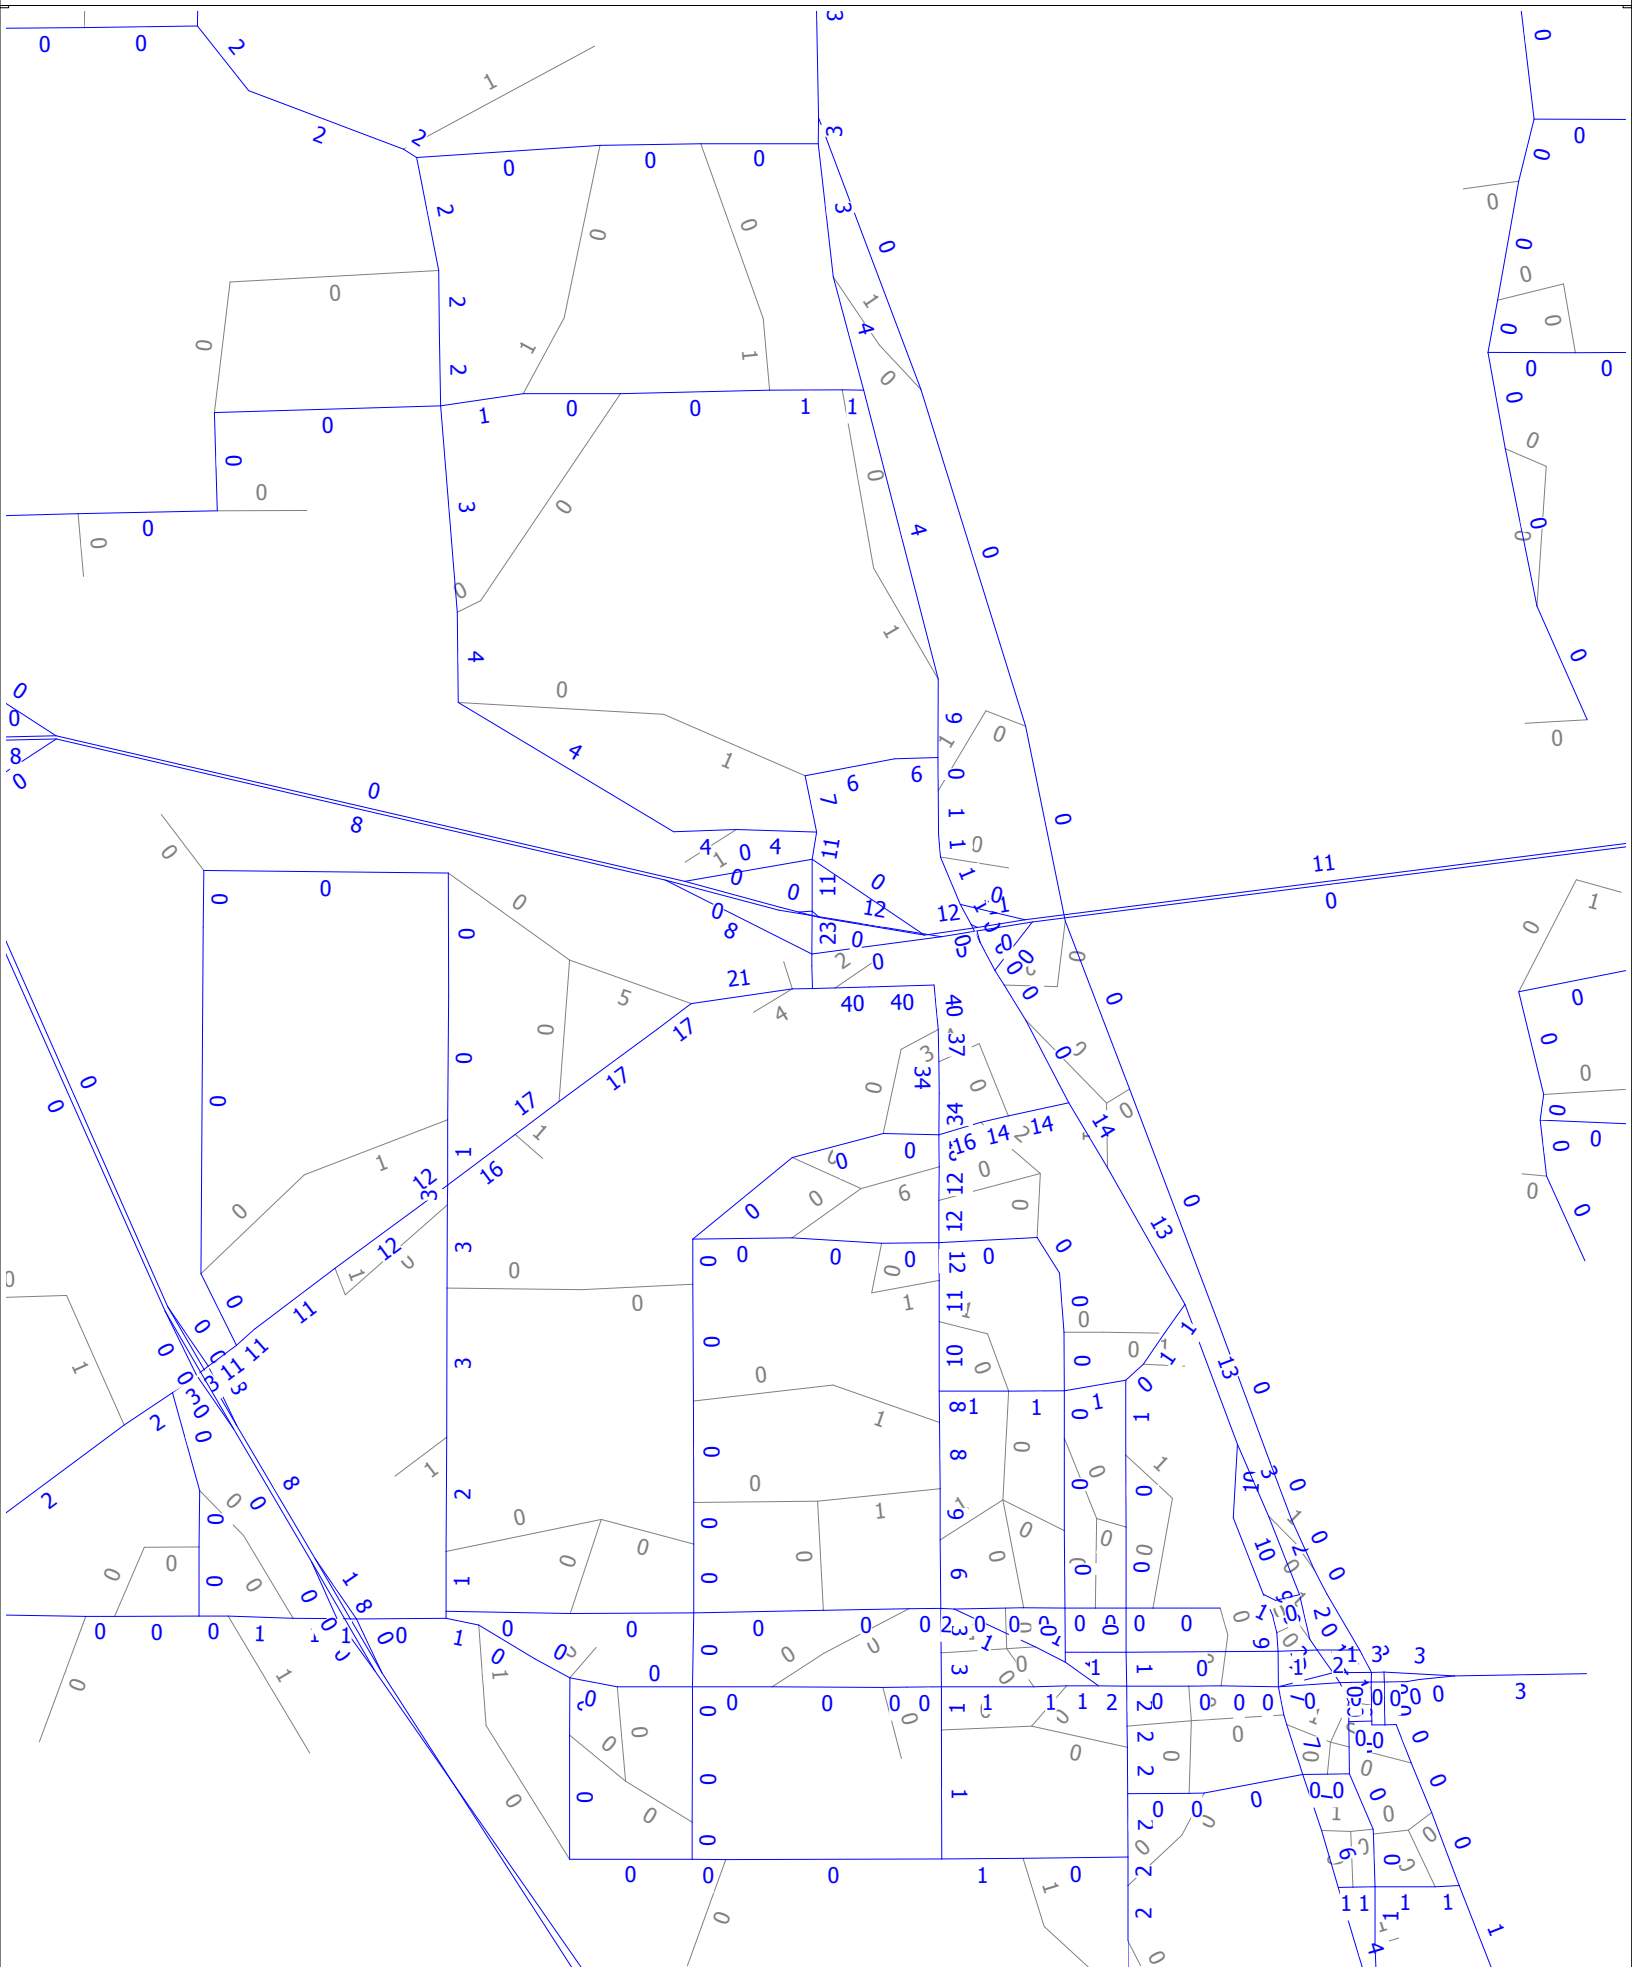


APPENDIX F

Trends Analysis Worksheets

Traffic Trends - V3.0 SR 524 , 0.054 MI N of SR 501 --

FIN#	1234
Location	1

County:	Brevard (70)
Station #:	70-0435
Highway:	SR 524 , 0.054 MI N of SR 501

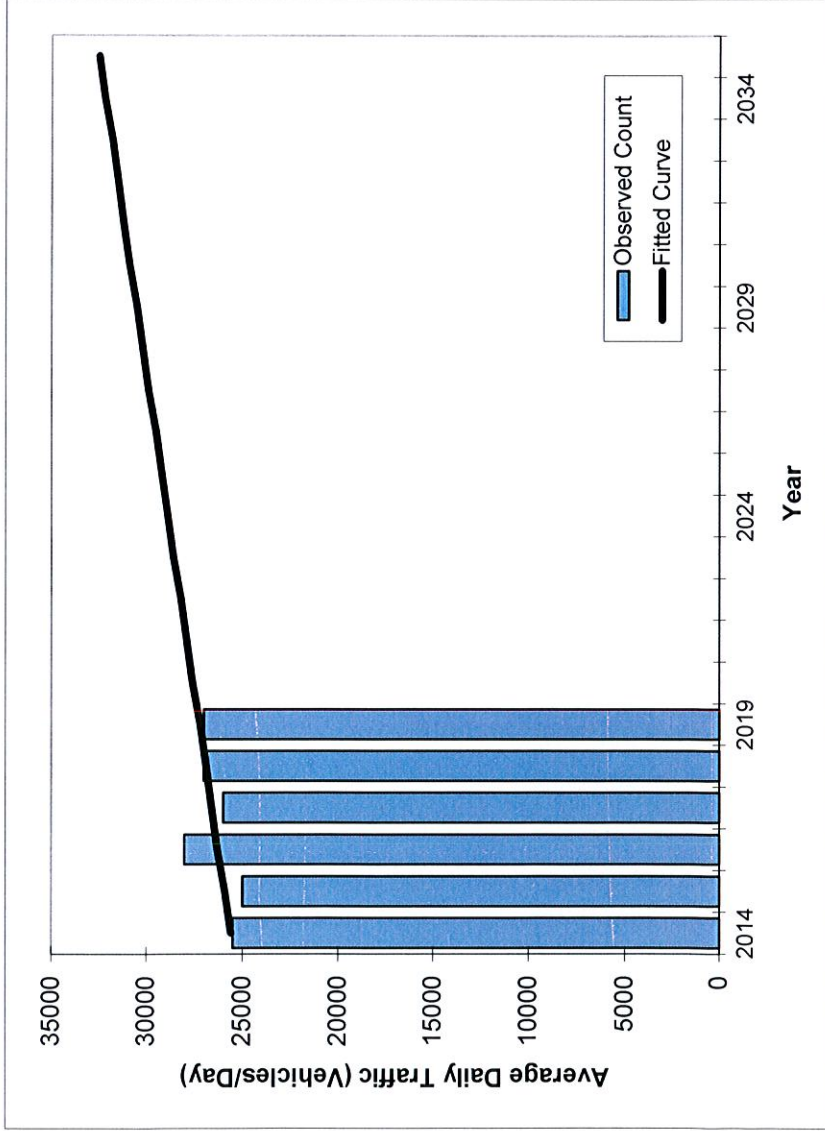

** Annual Trend Increase:	329
Trend R-squared:	30.43%
Trend Annual Historic Growth Rate:	1.25%
Trend Growth Rate (2019 to Design Year):	1.23%
Printed:	27-Aug-20
Straight Line Growth Option	

Year	Traffic (ADT/AADT)	
	Count*	Trend**
2014	25500	25600
2015	25000	25900
2016	28000	26300
2017	26000	26600
2018	27000	26900
2019	27000	27200
2021 Opening Year Trend		
2021	N/A	27900
2023 Mid-Year Trend		
2023	N/A	28600
2025 Design Year Trend		
2025	N/A	29200
TRANPLAN Forecasts/Trends		

*Axle-Adjusted

FLORIDA DEPARTMENT OF TRANSPORTATION
TRANSPORTATION STATISTICS OFFICE
2019 HISTORICAL AADT REPORT

COUNTY: 70 - BREVARD

SITE: 0435 - ON SR-524, 0.054 MI. N OF SR-501 (UVL)


YEAR	AADT	DIRECTION 1	DIRECTION 2	*K FACTOR	D FACTOR	T FACTOR
2019	27000 S	N 14500	S 12500	9.00	54.70	9.10
2018	27000 F	N 14500	S 12500	9.00	54.10	10.30
2017	26000 C	N 14000	S 12000	9.00	54.30	10.60
2016	28000 C	N 12500	S 15500	9.00	53.40	6.50
2015	25000 C	N 12500	S 12500	9.00	53.80	6.40
2014	25500 C	N 13500	S 12000	9.00	53.80	7.10
2013	21000 C	N 11000	S 10000	9.00	54.20	8.90
2012	23000 C	N 11500	S 11500	9.00	53.60	6.80
2011	23000 C	N 11500	S 11500	9.00	54.30	7.20
2010	21000 C	N 10000	S 11000	10.91	56.02	5.70
2009	23500 C	N 12000	S 11500	11.80	61.02	7.40
2008	24000 C	N 12500	S 11500	11.37	57.79	6.70
2007	25500 C	N 13000	S 12500	9.20	54.21	6.00
2006	24500 C	N 12500	S 12000	11.35	57.22	7.80
2005	23000 C	N 9000	S 14000	11.30	53.80	4.80
2004	19400 C	N 10000	S 9400	10.10	56.80	3.90

AADT FLAGS: C = COMPUTED; E = MANUAL ESTIMATE; F = FIRST YEAR ESTIMATE
S = SECOND YEAR ESTIMATE; T = THIRD YEAR ESTIMATE; R = FOURTH YEAR ESTIMATE
V = FIFTH YEAR ESTIMATE; 6 = SIXTH YEAR ESTIMATE; X = UNKNOWN
*K FACTOR: STARTING WITH YEAR 2011 IS STANDARDK, PRIOR YEARS ARE K30 VALUES

Traffic Trends - V3.0 SR 524 , 0.664 MI . W of SR 501 --

FIN#	1234
Location	1

County:	Brevard (70)
Station #:	70-0426
Highway:	SR 524 , 0.664 MI . W of SR 501

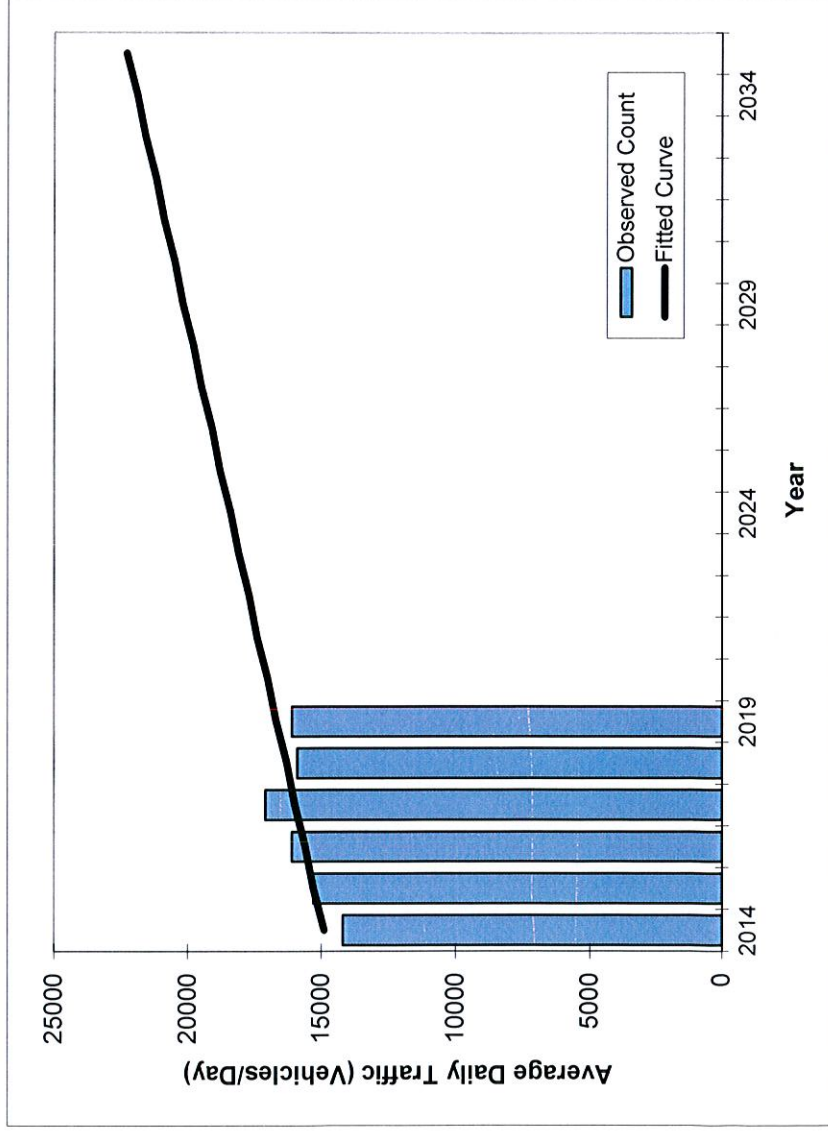

** Annual Trend Increase:	351
Trend R-squared:	46.10%
Trend Annual Historic Growth Rate:	2.42%
Trend Growth Rate (2019 to Design Year):	2.10%
Printed:	27-Aug-20
Straight Line Growth Option	

Year	Traffic (ADT/AADT)	
	Count*	Trend**
2014	14200	14900
2015	15300	15300
2016	16100	15600
2017	17100	16000
2018	15900	16300
2019	16100	16700
2021 Opening Year Trend		
2021	N/A	17400
2023 Mid-Year Trend		
2023	N/A	18100
2025 Design Year Trend		
2025	N/A	18800
TRANPLAN Forecasts/Trends		

*Axle-Adjusted

FLORIDA DEPARTMENT OF TRANSPORTATION
TRANSPORTATION STATISTICS OFFICE
2019 HISTORICAL AADT REPORT

COUNTY: 70 - BREVARD

SITE: 0426 - ON SR-524, 0.664 MI. W OF SR-501 (UVL)

YEAR	AADT	DIRECTION 1	DIRECTION 2	*K FACTOR	D FACTOR	T FACTOR
----	-----	-----	-----	-----	-----	-----
2019	16100 F	E 8200	W 7900	9.00	54.70	9.10
2018	15900 C	E 8100	W 7800	9.00	54.10	10.30
2017	17100 C	E 8600	W 8500	9.00	54.30	10.60
2016	16100 C	E 8100	W 8000	9.00	53.40	6.50
2015	15300 C	E 7600	W 7700	9.00	53.80	6.40
2014	14200 C	E 7200	W 7000	9.00	53.80	7.10
2013	12100 C	E 5400	W 6700	9.00	54.20	8.90
2012	13400 C	E 6700	W 6700	9.00	53.60	6.80
2011	14500 C	E 7300	W 7200	9.00	54.30	7.20
2010	15000 C	E 7400	W 7600	10.91	56.02	5.70
2009	15000 C	E 7400	W 7600	11.80	61.02	7.40
2008	15200 C	E 7800	W 7400	11.37	57.79	6.70
2007	15800 C	E 7900	W 7900	10.03	55.54	6.00
2006	15000 C	E 7500	W 7500	11.35	57.22	7.80
2005	16700 C	E 8300	W 8400	11.30	53.80	7.60
2004	14400 C	E 7200	W 7200	10.10	56.80	3.90

AADT FLAGS: C = COMPUTED; E = MANUAL ESTIMATE; F = FIRST YEAR ESTIMATE
S = SECOND YEAR ESTIMATE; T = THIRD YEAR ESTIMATE; R = FOURTH YEAR ESTIMATE
V = FIFTH YEAR ESTIMATE; 6 = SIXTH YEAR ESTIMATE; X = UNKNOWN
*K FACTOR: STARTING WITH YEAR 2011 IS STANDARDK, PRIOR YEARS ARE K30 VALUES

APPENDIX G


Projected HCS Capacity Worksheets

HCS7 Signalized Intersection Results Summary

General Information

Agency	TPD, Inc.		
Analyst	BH	Analysis Date	8/28/2020
Jurisdiction	Brevard County	Time Period	P.M. Peak Projected
Urban Street	SR 524	Analysis Year	2023
Intersection	SR 524 & London Blvd	File Name	SR 524 & London
Project Description	Cocoa Apartment		

Intersection Information



Demand Information

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (v), veh/h	29	812			952	128				91		21

Signal Information

Cycle, s	91.3	Reference Phase	2									
Offset, s	0	Reference Point	End									
Uncoordinated	Yes	Simult. Gap E/W	On	Green	3.3	63.1	6.9	0.0	0.0	0.0		
Force Mode	Fixed	Simult. Gap N/S	On	Yellow	4.0	4.0	4.0	0.0	0.0	0.0		
				Red	2.0	2.0	2.0	0.0	0.0	0.0		

Timer Results

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	1	6		2				8
Case Number	1.0	4.0		7.3				9.0
Phase Duration, s	9.3	78.4		69.1				12.9
Change Period, ($Y+R_c$), s	6.0	6.0		6.0				6.0
Max Allow Headway (MAH), s	4.9	4.9		4.9				5.1
Queue Clearance Time (g_s), s	2.4	22.2		35.8				6.9
Green Extension Time (g_e), s	0.0	25.9		27.3				0.3
Phase Call Probability	0.55	1.00		1.00				0.95
Max Out Probability	1.00	0.28		0.22				0.03

Movement Group Results

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	1	6			2	12				3		18
Adjusted Flow Rate (v), veh/h	32	883			1035	139				99		23
Adjusted Saturation Flow Rate (s), veh/h/ln	1810	1710			1900					1810		
Queue Service Time (g_s), s	0.4	20.2			33.8					4.9		
Cycle Queue Clearance Time (g_c), s	0.4	20.2			33.8					4.9		
Green Ratio (g/C)	0.75	0.79			0.69					0.08		
Capacity (c), veh/h	323	1356			1313					137		
Volume-to-Capacity Ratio (X)	0.098	0.651			0.788					0.723		
Back of Queue (Q), ft/ln (95 th percentile)	9.6	121.7			357.6					110.3		
Back of Queue (Q), veh/ln (95 th percentile)	0.4	4.9			14.3					4.4		
Queue Storage Ratio (RQ) (95 th percentile)	0.00	0.00			0.00					0.00		
Uniform Delay (d_1), s/veh	10.3	4.0			9.6					41.3		
Incremental Delay (d_2), s/veh	0.2	1.1			1.5					9.8		
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0					0.0		
Control Delay (d), s/veh	10.5	5.1			11.1	0.0				51.1		0.0
Level of Service (LOS)	B	A			B	A				D		A
Approach Delay, s/veh / LOS	5.3		A	9.8		A	0.0			41.5		D
Intersection Delay, s/veh / LOS	9.7						A					

Multimodal Results


	EB			WB			NB			SB		
Pedestrian LOS Score / LOS	0.63		A	1.86		B	1.96		B	1.96		B
Bicycle LOS Score / LOS	2.00		B	2.42		B						F

HCS7 Signalized Intersection Results Summary

General Information

Agency	TPD, Inc.		
Analyst	BH	Analysis Date	8/28/2020
Jurisdiction	Brevard County	Time Period	P.M. Peak Projected
Urban Street	SR 524	Analysis Year	2023
Intersection	SR 524 & Industry Rd	File Name	SR 524 & Industry
Project Description	Cocoa Apartment		

Intersection Information



Demand Information

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (v), veh/h	537	445	27	41	519	548	29	112	126	435	143	599

Signal Information

Cycle, s	120.4	Reference Phase	2
Offset, s	0	Reference Point	End
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Timer Results

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	1	6	5	2	7	4	3	8
Case Number	2.0	3.0	2.0	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	27.5	56.9	10.6	40.0	9.9	27.7	25.1	43.0
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Max Allow Headway (MAH), s	4.9	5.0	4.9	5.0	5.0	5.2	5.0	5.2
Queue Clearance Time (g_s), s	20.0	25.9	4.7	36.0	3.9	8.3	16.4	39.0
Green Extension Time (g_e), s	1.5	0.0	0.0	0.0	0.0	0.0	2.7	0.0
Phase Call Probability	1.00	1.00	0.77	1.00	0.64	1.00	1.00	1.00
Max Out Probability	0.98	1.00	1.00	1.00	1.00	1.00	0.01	1.00

Movement Group Results

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	1	6	16	5	2	12	7	4	14	3	8	18
Adjusted Flow Rate (v), veh/h	571	473	29	44	552	583	31	119	102	463	152	563
Adjusted Saturation Flow Rate (s), veh/h/ln	1853	1847	1699	1909	2004		1909	2004	1699	1853	2004	1699
Queue Service Time (g_s), s	18.0	23.9	1.2	2.7	32.9		1.9	6.2	6.3	14.4	6.9	37.0
Cycle Queue Clearance Time (g_c), s	18.0	23.9	1.2	2.7	32.9		1.9	6.2	6.3	14.4	6.9	37.0
Green Ratio (g/C)	0.18	0.42	0.42	0.04	0.28		0.03	0.18	0.18	0.16	0.31	0.31
Capacity (c), veh/h	663	781	719	73	566		61	362	306	589	616	522
Volume-to-Capacity Ratio (X)	0.861	0.606	0.040	0.597	0.976		0.504	0.329	0.333	0.786	0.247	1.078
Back of Queue (Q), ft/ln (95 th percentile)	343.6	415.3	20.5	66.8	695.4		47.8	140.3	120.8	277.9	148.7	840.6
Back of Queue (Q), veh/ln (95 th percentile)	13.6	15.3	0.8	2.7	27.6		1.9	5.6	4.8	11.0	5.9	33.4
Queue Storage Ratio (RQ) (95 th percentile)	0.00	0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00	0.00
Uniform Delay (d_1), s/veh	48.0	26.9	20.4	57.0	42.8		57.3	43.0	43.0	48.7	31.3	41.7
Incremental Delay (d_2), s/veh	9.4	1.6	0.0	10.6	31.6		8.8	0.8	0.9	3.3	0.3	62.1
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (d), s/veh	57.4	28.5	20.4	67.6	74.4	0.0	66.2	43.7	43.9	52.0	31.6	103.8
Level of Service (LOS)	E	C	C	E	E	A	E	D	D	D	C	F
Approach Delay, s/veh / LOS	43.7		D	37.4		D	46.6		D	74.1		E
Intersection Delay, s/veh / LOS	51.6						D					

Multimodal Results


	EB			WB			NB			SB		
Pedestrian LOS Score / LOS	2.15		B	2.55		C	2.31		B	2.29		B
Bicycle LOS Score / LOS	2.26		B	2.43		B	0.90		A	2.43		B

HCS7 Signalized Intersection Results Summary

General Information

Agency	TPD, Inc.		
Analyst	BH	Analysis Date	8/28/2020
Jurisdiction	Brevard County	Time Period	P.M. Peak Projected
Urban Street	SR 524	Analysis Year	2023
Intersection	SR 524 & CVS Entrance	File Name	SR 524 & CVS En
Project Description	Cocoa Apartment		

Intersection Information



Demand Information

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (v), veh/h	72	788	62	32	897	132	140	18	18	171	8	91

Signal Information

Cycle, s	107.2	Reference Phase	2								
Offset, s	0	Reference Point	End								
Uncoordinated	Yes	Simult. Gap E/W	On	Green	3.9	42.1	5.7	10.0	15.4	0.0	
Force Mode	Fixed	Simult. Gap N/S	On	Yellow	4.0	4.0	4.0	4.0	4.0	0.0	
				Red	2.0	2.0	2.0	2.0	2.0	0.0	

Timer Results

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	1	6	5	2		4		8
Case Number	2.0	3.0	2.0	3.0		10.0		12.0
Phase Duration, s	11.7	59.9	9.9	58.0		16.0		21.4
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0		6.0		6.0
Max Allow Headway (MAH), s	4.9	4.9	4.9	4.9		5.0		5.0
Queue Clearance Time (g_s), s	6.3	41.9	3.9	54.0		10.3		15.0
Green Extension Time (g_e), s	0.0	0.0	0.0	0.0		0.0		0.5
Phase Call Probability	0.90	1.00	0.64	1.00		1.00		1.00
Max Out Probability	1.00	1.00	0.28	1.00		1.00		1.00

Movement Group Results

	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	1	6	16	5	2	12	7	4	14	3	8	18
Adjusted Flow Rate (v), veh/h	78	857	67	35	975	143	152	28			234	
Adjusted Saturation Flow Rate (s), veh/h/ln	1905	2000	1695	1905	2000	1695	1924	1914			1888	
Queue Service Time (g_s), s	4.3	39.9	2.2	1.9	52.0	5.1	8.3	1.5			13.0	
Cycle Queue Clearance Time (g_c), s	4.3	39.9	2.2	1.9	52.0	5.1	8.3	1.5			13.0	
Green Ratio (g/C)	0.05	0.50	0.50	0.04	0.49	0.49	0.09	0.09			0.14	
Capacity (c), veh/h	102	1005	852	69	970	822	180	179			272	
Volume-to-Capacity Ratio (X)	0.769	0.852	0.079	0.506	1.005	0.174	0.848	0.158			0.859	
Back of Queue (Q), ft/ln (95 th percentile)	125.6	631.9	34.6	46.1	961.6	81.1	230	31.5			287.8	
Back of Queue (Q), veh/ln (95 th percentile)	5.0	25.3	1.4	1.8	38.5	3.2	9.2	1.3			11.5	
Queue Storage Ratio (RQ) (95 th percentile)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			0.00	
Uniform Delay (d_1), s/veh	50.1	23.2	13.8	50.7	27.6	15.5	47.8	44.7			44.8	
Incremental Delay (d_2), s/veh	29.0	7.4	0.1	8.0	30.0	0.1	30.5	0.6			17.0	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			0.0	
Control Delay (d), s/veh	79.1	30.6	13.9	58.7	57.6	15.7	78.3	45.3			61.8	
Level of Service (LOS)	E	C	B	E	F	B	E	D			E	
Approach Delay, s/veh / LOS	33.2		C	52.4		D	73.1		E	61.8		E
Intersection Delay, s/veh / LOS	47.3						D					

Multimodal Results

	EB			WB			NB			SB		
Pedestrian LOS Score / LOS	1.92		B	1.81		B	2.14		B	2.15		B
Bicycle LOS Score / LOS	2.14		B	2.39		B	0.79		A	0.87		A